

.....
.....
.....



.....
.....
.....



Cupwind 專業生產各種規格 紙杯 紙碗, 紙盤 紙碟 OEM 及 ODM 服務 歡迎垂詢



Cupwind 10000m² 20



XXXXXXXXXXXXXXXXXXXXXXXXXXXX



TEST REPORT



8521097-0435
Page 3 of 4

SHENZHEN JIERUMA TRADING CO., LTD.
NO.415 SUNLIAN BUILDING, SHENZHEN ROAD,
HENGJIANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: 8521097-0435

ATTN: EMMA ZOU
CC: emma@joupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN:
DATE OUT: APR 13, 2021
REVISED DATE:
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING

PASS ☒
FAIL ☐
DATA ☐

TESTING FOR CA 95 LEAD & CADMIUM ON NON-FOOD / BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	IRIDESCENT COATING CANDLE JAR	P.O. No.:	
Manufacturer:	CUJWIND COOPERATED FACILITY	Style:	
Buyer:	SPOT	Country of Origin:	CHINA
Country of Origin:	CHINA	Country of Destination:	USA
Color:	IRIDESCENT	SKU Number:	ITEM# 8090
Brand name:	CUJWIND®		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☒ No: ☐
Previous Report No.:	17		

EXECUTIVE SUMMARY:

Test content	Result Rating	Must Pass
CA 95 Lead & Cadmium on non-food/beverage glassware-exterior		
Effectiveness of annealing: ASTM F2179-20 Sec. 4.2 (NA0) With a tungsten-carbide scriber, scratch once around the inside knuckle of the article. Then scratch an "X" across the entire inside bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Fill each article with water at the same room temperature as the glass. Wait 15 minutes, then empty the water and examine each piece for fractures. Shall show no fractures. Report the number of fractures, if any, for each test.	M	PASS
Thermal shock: ASTM F2179-20 Sec. 4.2 (Mod) / ASTM C140 Modification: expanded scope to all other glass products in addition to candle containers. Shall not crack or break after being per below: - prepare a cold water bath at 21 ± 1.1°C (70 ± 2°F); - prepare a hot bath at 71 ± 1.1°C (160 ± 2°F); - immerse the sample completely in the hot water bath and allow to soak for 1 min ± 10 s; - transfer the sample to the cold bath, and immerse for at least 30 s; - remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. - the time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to candle containers.	M	PASS

REMARK:


1. No enclosed protocol for test results in this report.



XXXXXXXXXXXXXXXXXXXX

XXXXXXXX opp XXXXXXXX24 1/48 1/72 1/144 XXXXXXXXXXXXXXXX

XX

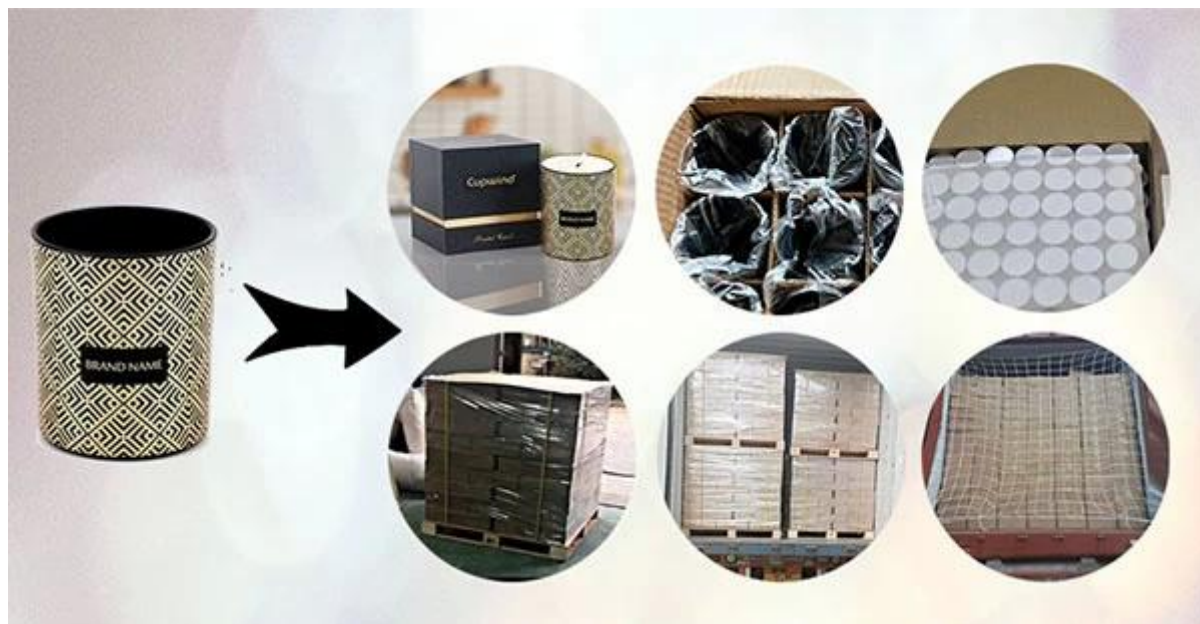

00000000Cupwind 000 00 0 000 0000000 00000 0000000000000000
 00000000000000000000



Wick Trimmer Cutter



Zinc Alloy Lid



Wooden Lid



Neck



Stopper



Reed



Gift Box.



Gift Box

