

200ml 玻璃杯



玻璃杯的材质为高硼硅玻璃，具有良好的耐热性和耐冲击性，适用于各种冷热饮品的盛装。

玻璃杯的容量为 5.5 升，适合家庭或办公室使用。



□□□□□

10000□□□□□□□□

20□□□□□□□□□□

20□□□□□□□

20□□□□□□□□□

Armani Zara□□□□□□□□

[□□□□□□ .](#)



Cupwind [Glassware Manufacturer](#) OEM & ODM

[Glassware Manufacturer](#) [Glassware Manufacturer](#)

[Glassware Manufacturer](#)

[Cupwind Glassware Manufacturer](#) .



•

TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HENGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-0435

ATTN: EMMA ZOU
CC: emma@oupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u> X </u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD /
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	DESCENDANT COATING CANDLE JAR		
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PSY	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Color:	DESCENDANT	SKU Number:	110Mar 8090
Brand name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☐ No: ☐
Previous Report No.:	/		



Page 3 of 4

EXECUTIVE SUMMARY

Test content		Result Rating	
Ca II L and Ca II H as Ca II indicators on non-food/beverage glassware surface		Moist Pass	
Effectiveness of rinsing	ASTM F2179-90 (Sec. 4.2.3 MoE)	With a large open carafe or bottle, pourish once from the bottom of the article. Then pourish the article inside bottom surface of the article. All surfaces are to be made using sufficient pressure to just penetrate the surface of the glass. Rinse the article with water at the same room temperature as the glass. Wait 15 minutes. Then dry the water and examine each piece for fractures. That area is not fractures. Report the number of fractures, if any, for each test.	M PASS
Thermal shock	ASTM F2179-90 (Sec. 4.2.3 MoE) / ASTM F2179-90 (Sec. 4.2.3 MoE)	Modification: expanded scope to all other glass products in addition to beverage containers. 1. Prepare a hot water bath at 215 ± 1°C (420 ± 2°F). 2. Prepare a hot bath at 77 ± 1°C (160 ± 2°F). 3. Immerse the sample completely in the hot water bath and allow it to soak for 30 min ± 10 s. 4. Transfer the sample to the cold bath and immerse for at least 30 s. 5. Remove the sample from the cold bath and examine the sample for any cracking. Note: - The hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. - The time of transfer from the hot bath to the cold bath shall be 15 ± 5 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to beverage containers.	M PASS

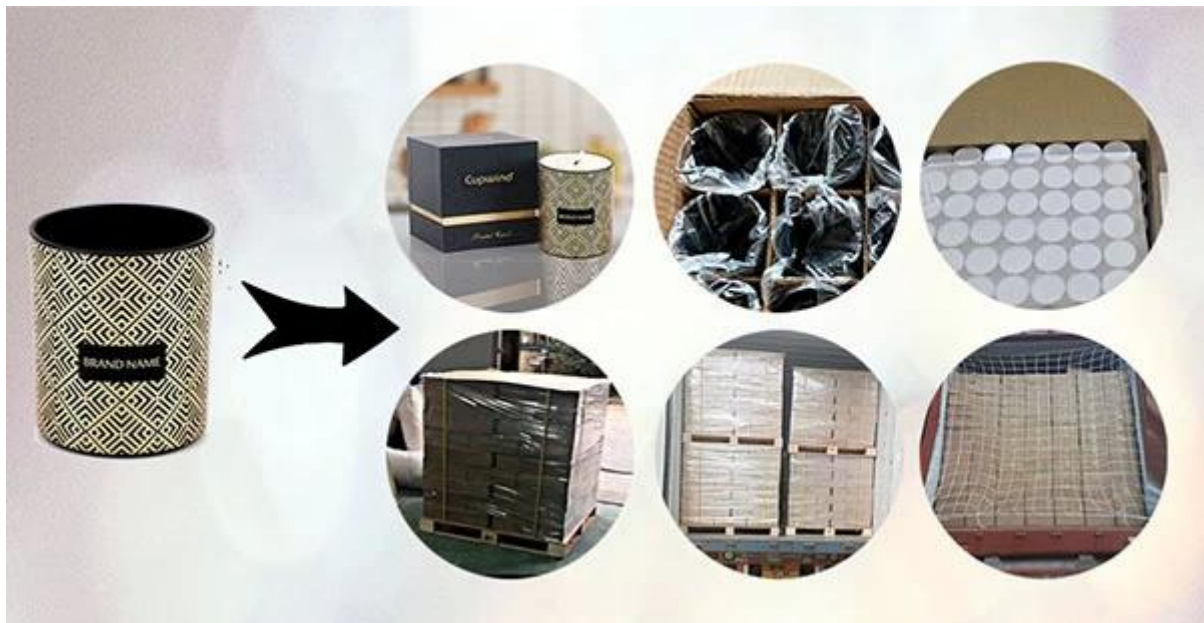
REMARK:

1. Not analyzed/protocol for test results in this report.

□ □ □ □ □

□□□□□□□□□□

□□□□□ opp □□□□□24 □/48 □/72 □/144 □□□□□□□□□□□□

[illegible]

--	--	--	--	--	--	--	--

