

200ml 玻璃杯



玻璃杯的材质为高硼硅玻璃，具有良好的耐热性和耐冲击性，适用于各种冷热饮品的盛装。

玻璃杯的容量为 5.5 升，适合家庭或办公室使用。



□□□□□

10000□□□□□□□□

20□□□□□□□□□□

20□□□□□□□

20□□□□□□□□□

Armani Zara□□□□□□□□

[□□□□□□□ .](#)



Cupwind [Glassware Manufacturer](#) OEM & ODM

[Glassware Manufacturer](#) [Glassware Manufacturer](#) [Glassware Manufacturer](#)

[Glassware Manufacturer](#) [Glassware Manufacturer](#)

[Cupwind Glassware Manufacturer](#) .



TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD
HENGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-0435

ATTN: EMMA ZOU
CC: emma@oupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u> X </u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD /
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	DESCENDANT COATING CANDLE JAR		
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PSY	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Color:	DESCENDANT	SKU Number:	110Mar 8090
Brand name:	CUPWIND II		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☐ No: ☐
Previous Report No.:	/		



185217087 04/25
Page 3 of 4

EXECUTIVE SUMMARY

Test content		Result Rating		
Ca II L and Ca II H on non-food/beverage glassware surface		Moist Pass		
Effectiveness of rinsing	ASTM F2179-90 (Sec. 4.2.3 MoE)	With a largeen caride sprayer, sprout the surface from the back cracks of the article. Then sprout the surface of the article inside bottom surface of the article. All sprouts are to be made using sufficient pressure to just penetrate the surface of the glass.	M	PASS
Thermal shock	ASTM F2179-90 (Sec. 4.2.3 MoE) / ASTM D1545	After 15 minutes, remove the water and examine each piece for fractures. That area is not broken. Report the number of fractures, if any, for each test. Modification: expanded scope to all other glass products in addition to beverage containers. ASTM D1545 is broken after the water is added, prepare a cold water bath at 21 ± 1 °C (70 ± 2 °F). Prepare a hot bath at 71 ± 1 °C (160 ± 2 °F) and immerse the sample completely in the hot water until the sample is at least 3 min ± 1 s. Transfer the sample to the cold bath and immerse for at least 30 s. Remove the sample from the cold bath and examine the sample for any cracking. Note: The hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. The time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to beverage containers.	M	PASS

REMARK:


1. Not analyzed/protocol for test results in this report.

□□□□□

□□□□□□□□□□

□□□□ opp □□□□24 □/48 □/72 □/144 □□□□□□□□□□

□ □

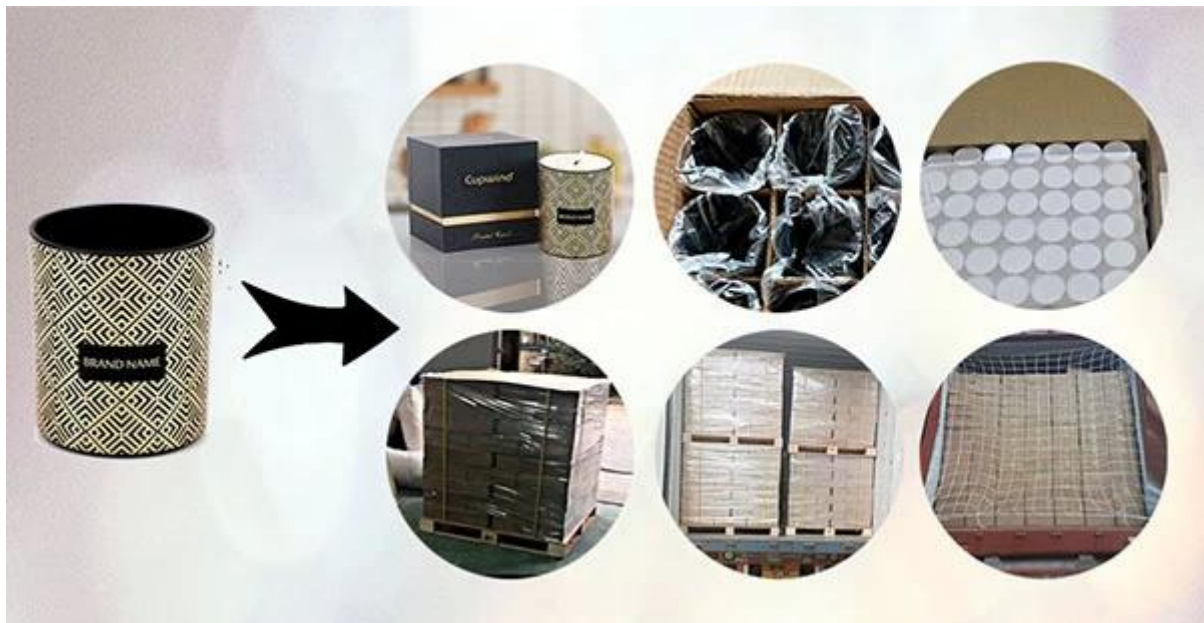

--	--	--	--	--	--	--	--

