

7 กระจกใส - กระจกใสธรรมดา Tealight ใส



กระจกใส 7mm กระจกใสธรรมดา กระจกใสธรรมดา กระจกใสธรรมดา
กระจกใสธรรมดา กระจกใสธรรมดา กระจกใสธรรมดา กระจกใสธรรมดา
กระจกใสธรรมดา กระจกใสธรรมดา กระจกใสธรรมดา กระจกใสธรรมดา



□□□□

10000□□□□□□

20□□□□□□□□

20□□□□□□

20□□□□□□□□

Armani Zara□□□□□□□□

[□□□□□□ .](#)



Cupwind 專業生產 OEM 及 ODM

各種規格玻璃杯、馬克杯、啤酒杯、威士忌杯、

咖啡杯、茶杯、果汁杯、

[Cupwind 專業生產各種玻璃杯](#)。

•



TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD
HONGKANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-6435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u>X</u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:		DESCENDANT COATING CANDLE JAR	
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PRV	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Commodity Code:	RESIDENTIAL	SKU Number:	110MAR 0090
Brand Name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☐	Change Vendor:	Yes: ☐ No: ☐
Previous Report No.:	/		

EXECUTIVE SUMMARY

Test content		Result Rating		
CA 101 Lead & Cadmium on non-food/overage glassware interior		Moist Heat		
Effectiveness of annealing	ASTM F2179-96 Sec. 4.2 (Mo)	With a tungsten-carbide wire, scratch once around the inside rim of the article. Then scribe an "X" across the inside bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Fill article with water at the same room temperature as the glass. Wait 15 minutes. Remove the water and examine each piece for fractures. Each article is to fracture. Report the number of fractures, if any, for each test.	M	PA33
Thermal shock	ASTM F2179-96 Sec. 4.2 (Mo) / ASTM C149	Modification: expanded scope to all other glass products in addition to beverage containers. Soak test sample in hot water (180 °F) for 15 min. Prepare a cold-water bath at 21° ± 1° (70 °F ± 2°). Transfer a hot sample at 21° ± 1° (70 ± 2°) immerse the sample completely in the cold-water bath and allow to settle for 15 s. Transfer the sample to the cold bath and immerse for at least 30 s. Remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container - the subsequent immersion - the time of transfer from the hot bath to the cold bath shall be 15 ± 1 s Modification: sampling procedure not followed and expanded scope to all other glass products in addition to beverage containers.	M	PA33

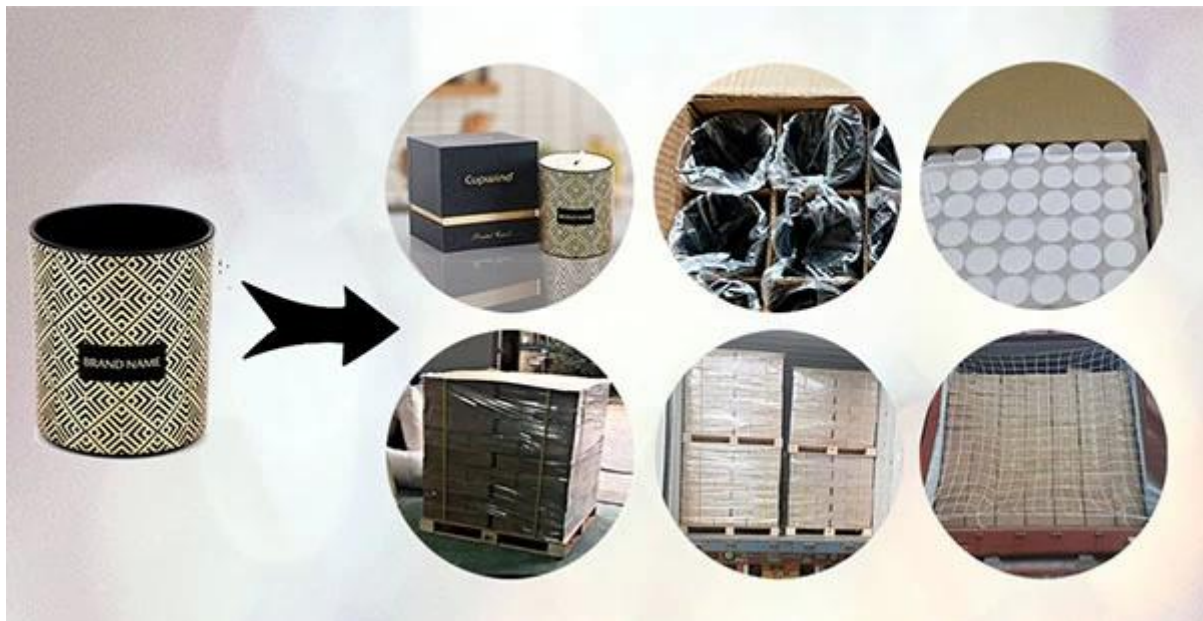
REMARK.

1. Not analyzed/protocol for test results in this report.

□□□□□

11111111

□□□□□ opp □□□□□24 □/48 □/72 □/144 □□□□□□□□□□□□

[illegible]

□ □ □ □ □ □ □ □

Cupwind



Wick Trimmer Cutter



Zinc Alloy Lid



Wooden Lid



Neck



Stopper



Reed



Gift Box.



Gift Box