

9x6.5cm □□□□□□ **7** □□□□□□“□□□”

[illegible]

□□□□□ 7 □□□□□□□□□□ 8.8 □□

□ □



□□□□

10000□□□□□□

20□□□□□□□□

20□□□□□□

20□□□□□□□□

Armani Zara□□□□□□□□

[□□□□□□ .](#)



Cupwind 專業 OEM 及 ODM

[illegible]

□□□□□□□□□□□□□□□□

Cupwind □□□□□□□□□□□□□□ .



□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

.



TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD
HONGKANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-6435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u> X </u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:		DESCENDANT COATING CANDLE JAR	
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PRV	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Commodity:	DESCENDANT	SKU Number:	110MAR 0090
Brand Name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☐	Change Vendor:	Yes: ☐ No: ☐
Previous Report No.:	/		

EXECUTIVE SUMMARY:

Test content		Result Rating	
Ca II, Lead & Cadmium on non-food/beverage glassware/enfleur		Moist Pass	
Effectiveness of rinsing	ASTM F2179-90 (Sec. 4.2.3.3.4)	Wipe a large area (one square, roughly one around the handle knuckle) of the article. Then position an 800 mesh sieve on the article bottom surface of the article. All residues may be made using sufficient pressure to just penetrate the surface of the glass. Wash the article with water at the same room temperature as the glass. Wait 15 minutes. Then dry the water and examine each piece for fractures. That area is not broken. Report the number of fractures, if any, for each test.	PA33
Thermal shock	ASTM F2179-90 (Sec. 4.2.3.3.5) (ASTM C149)	Modification: expanded scope to all other glass products in addition to beverage containers. ASTM C149 is broken. The test is replaced by preparing a cold water bath at $21.1 \pm 1.1^\circ \text{C}$ ($70 \pm 2^\circ \text{F}$). Prepare a hot bath at $71 \pm 1.1^\circ \text{C}$ ($160 \pm 2^\circ \text{F}$) and immerse the sample completely in the hot water. Remove the sample from the hot bath and immerse the sample in the cold bath. Remove the sample from the cold bath and examine the sample for any cracking. Note: - The hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. - The time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to beverage containers.	PA33

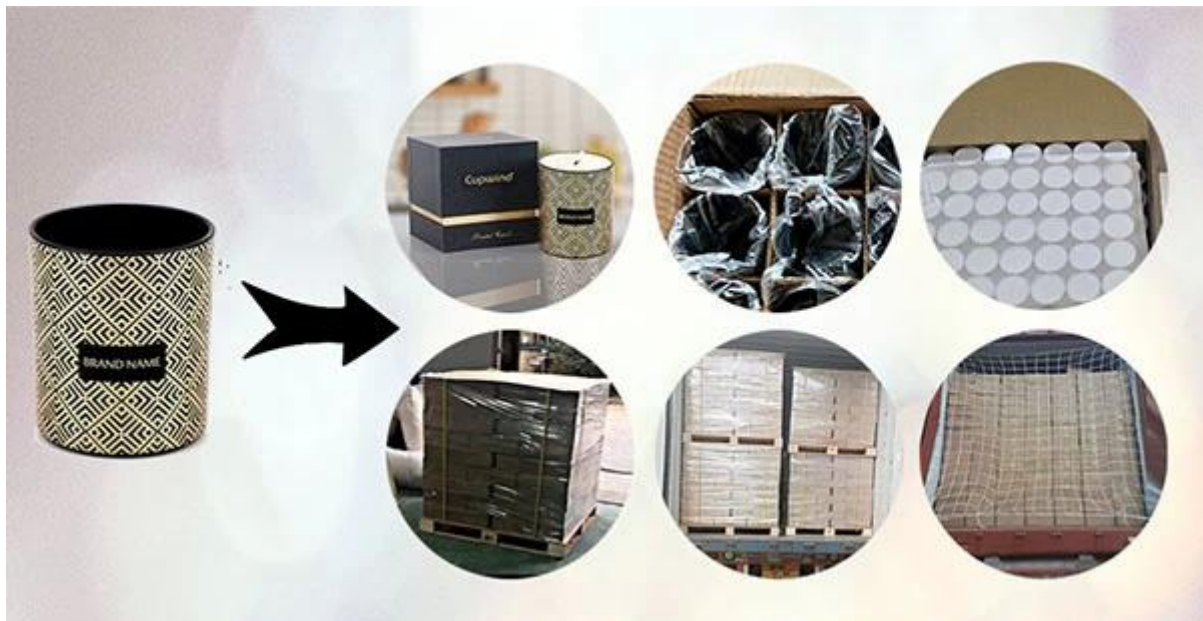
REMARK.

1. Not reviewed/protocol for test results in this report.

□ □ □ □ □

□□□□□□□□□□

□□□□□ opp □□□□□24 □/48 □/72 □/144 □□□□□□□□□□□□

[illegible]

□ □ □ □ □ □ □ □

Cupwind



Wick Trimmer Cutter



Zinc Alloy Lid



Wooden Lid



Neck



Stopper



Reed



Gift Box.



Gift Box