

9x6.5cm 鋼製 7 個装



ステンレス鋼製、耐久性、衛生性、美観性を兼ね備えた製品です。

ステンレス 7 個装、サイズは 9x6.5cm、重量は 8.8g です。

ステンレス鋼製、耐久性、衛生性、美観性を兼ね備えた製品です。



□□□□

10000□□□□□□

20□□□□□□□□

20□□□□□□

20□□□□□□□□

Armani Zara□□□□□□□□

[□□□□□□ .](#)



Cupwind [Cupwind Packaging](#) OEM & ODM

[Cupwind Packaging](#) is a leading manufacturer of custom packaging solutions.

[Cupwind Packaging](#) offers a wide range of products and services.

[Cupwind Packaging](#) is committed to providing high-quality, custom packaging solutions.



TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HENGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-0435

ATTN: EMMA ZOU
CC: emma@oupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u> X </u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD /
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	DESCENDANT COATING CANDLE JAR		
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PSY	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Color:	DESCENDANT	SKU Number:	110Mar 8090
Brand name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☐ No: ☐
Previous Report No.:	/		



Page 3 of 4

EXECUTIVE SUMMARY

Test content		Result Rating
Ca II L-Leu & Cadmium on non-food/overage glassware inference		Most Pass
Effectiveness of rinsing	ASTM F2179-90 (Sec. 4.2.3.3.6)	M PASS
Thermal shock	ASTM F2179-90 (Sec. 4.2.3.3.6) & ASTM C149	M PASS
	With a large open carafe or bottle, pourish once from the back knuckle of the article. Then position the article inside the carafe to the bottom surface of the article. All surfaces are to be made using sufficient pressure to just penetrate the surface of the glass. The article with water at the same room temperature as the glass. Wait 15 minutes, then empty the water and examine each piece for fractures. That area is not broken. Report the number of fractures, if any, for each test. Modification: expanded scope to all other glass products in addition to carafe containers. ASTM C149 is not used for break after thermal shock, prepares a cold water bath at 21±1.1°C (70±2°F). Prepare a hot bath at 71±1.1°C (160±2°F) immerse the sample completely in the hot water and allow time to attain 10 min ± 1 s. Transfer the sample to the cold bath and immerse for at least 30 s. Remove the sample from the cold bath and examine the sample for any cracking. Note: The hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. The time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to carafe containers.	

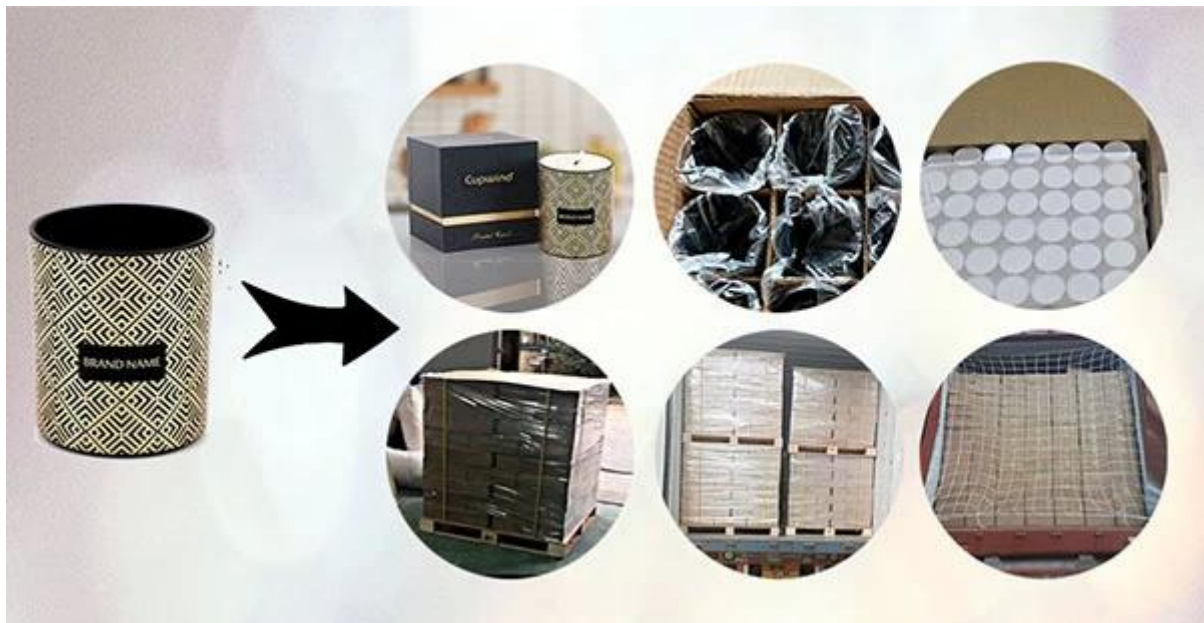
REMARK:

1. Not reviewed/protocol for test results in this report.

□□□□□

□□□□□□□□□□

□□□□□ opp □□□□□24 □/48 □/72 □/144 □□□□□□□□□□□□

[illegible]

--	--	--	--	--	--	--	--

