



11

10000

20

20

20

Armani Zara





Cupwind 11



Cupwind [www.cupwind.com](#) OEM & ODM

www.cupwind.com

www.cupwind.com

Cupwind [www.cupwind.com](#) c .



XXXXXXXXXXXXXXXXXXXXXXXXXXXX



TEST REPORT



85211087-0435
Page 3 of 4

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HENGGAO, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: 85211087-0435

ATTN: SIMAA ZOU
CC: emma@oupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	☒
FAIL	☐
DATA	☐

TESTING FOR
CA RS LEAD & CADMIUM ON NON-FOOD /
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	IRIDESCENT COATING CANDLE JAR	P.O. No.:	
Manufacturer:	OUFWIND COOPERATED FACTORY		
Buyer:	IPSY	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Color:	IRIDESCENT	SKU Number:	ITEM# 3050
Brand name:	OUFWIND®		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☒ No: ☐
Previous Report No.:	17		

EXECUTIVE SUMMARY:

Test Content		Result/Rating	Result
CA 91 Lead & Cadmium on non-food/beverage glassware exterior		Pass/Fail	
Effectiveness of annealing	ASTM F2179-20 Sec. 4.2 (M4b)	M	PASS
Wipe a 10-cm square swatch, swatch twice around the middle knob of the article. Then swatch an "X" across the entire middle knob surface of the glass. All swatches are to be made using sufficient pressure to penetrate the surface of the glass. Fill each article with water at the same room temperature as the glass. Wait 15 minutes, then drain the water and examine each article for fractures. Should show no fractures. Record the number of fractures, if any, for each test.			
Thermal shock	ASTM F2179-20 Sec. 4.2 (M4b) / ASTM C149	M	FAIL
Modification: expanded scope to all other glass products in addition to jarable containers. Do not crack or break after sample per Seize - jarable - cold-water bath at 21 ± 1 °C (70 ± 2 °F). Prepare a hot bath at 71 ± 1 °C (160 ± 2 °F) immerse the sample completely in the hot water bath and allow to soak for time = 10 ± 1 - transfer the sample to the cold bath, and immerse for at least 30 s - remove the sample from the cold bath and examine the sample for any cracking. Note: • The hot water that collects within the container during the trip immersion shall be retained in the container through the second immersion. • The trip of transfer from the hot bath to the cold bath shall be 15 s. Modification: sampling procedure not required and expanded scope to all other glass products in addition to jarable containers.			

REMARK:


1. No enclosed protocol for test results in this report.



包裝規格

包裝 opp 24 48 72 144 包裝規格

包裝規格

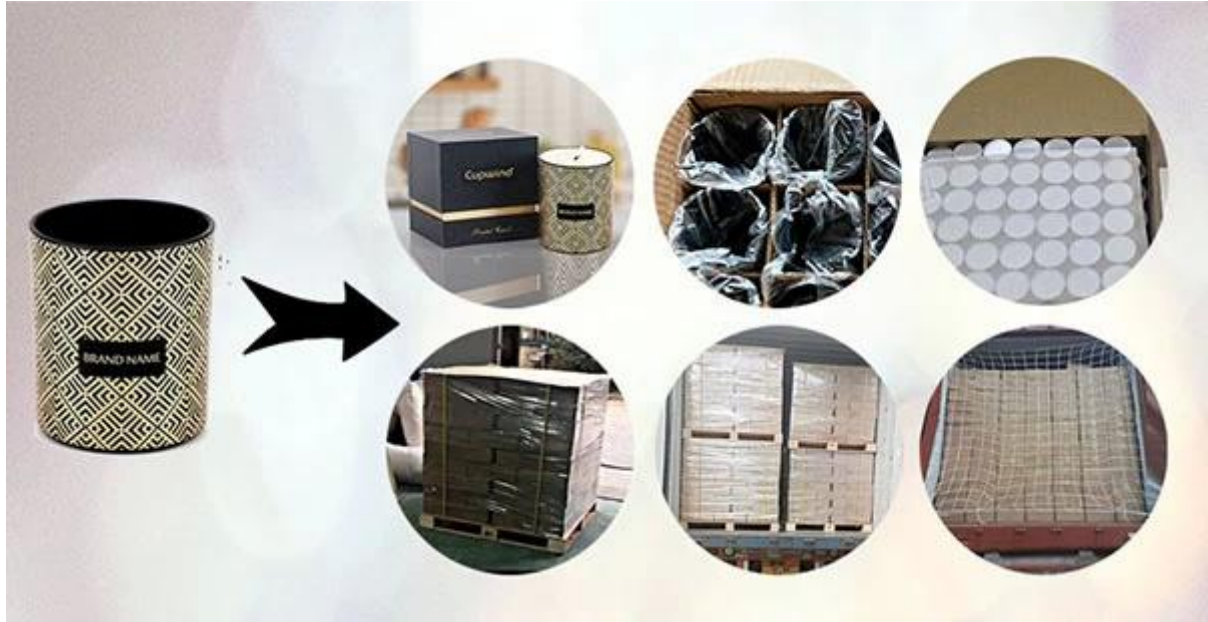

包裝規格

Cupwind 包裝規格



Wick Trimmer Cutter



Zinc Alloy Lid



Wooden Lid



Neck



Stopper



Reed

Gift Box.



Gift Box