

Figure 11



Figure 11 shows two cylindrical containers, one pink and one yellow, both exhibiting a textured, fibrous interior surface. The containers are shown against a black background.

Figure 11 shows two cylindrical containers, one pink and one yellow, both exhibiting a textured, fibrous interior surface. The containers are shown against a black background.



□□□□

10000□□□□□□


20□□□□□□

20□□□□

20□□□□□□

Armani Zara□□□□□□

.

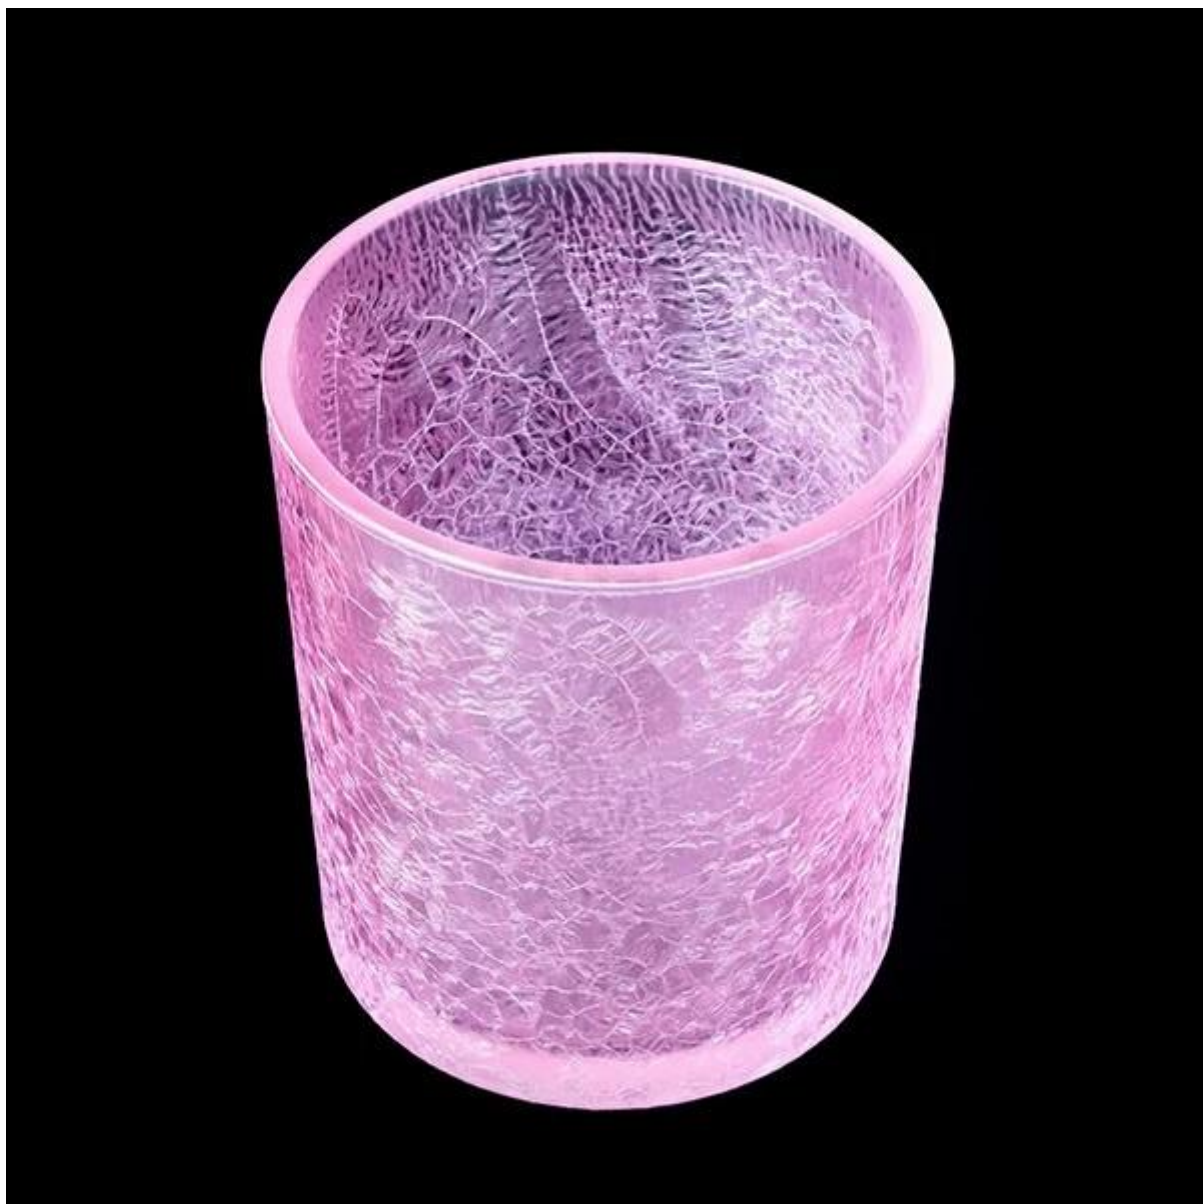

Cupwind [Cupwind Glassware](#) OEM & ODM

[Cupwind Glassware](#) Customized Glassware

[Cupwind Glassware](#) Customized Glassware

[Cupwind Glassware](#) Customized Glassware .









□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

.

TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HONGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-0435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u> X </u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD /
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:		DESCENDANT COATING CANDLE JAR	
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PRV	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Commodity:	DESCENDANT	SKU Number:	11044-0090
Brand Name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☐	Change Vendor:	Yes: ☐ No: ☐
Previous Report No.:	/		



Page 3 of 4

EXECUTIVE SUMMARY

Test content		Result Rating	
Ca II, Lead & Cadmium on non-food/beverage glassware/enfleur		Moist Pass	
Effectiveness of rinsing	ASTM F2179-93 (Sec. 4.2.3.3.4)	Wipe a large-area circular area, roughly one-third the inside surface of the article. Then position an 80-grit sandpaper on the inside bottom surface of the article. All surfaces are to be made using sufficient pressure to just penetrate the surface of the glass. Wipe the article with water at the same room temperature as the glass. Wait 15 minutes. Then dry the water and examine each piece for fractures. That area is not broken. Report the number of fractures, if any, for each test.	PA33
Thermal shock	ASTM F2179-93 (Sec. 4.2.3.3.5) (ASTM C149)	Modification: expanded scope to all other glass products in addition to beverage containers. ASTM C149 is broken. The test below prepares a cold-water bath at 21.1 ± 1.1°C (70 ± 2°F). Prepare a hot bath at 71 ± 1.1°C (160 ± 2°F) and immerse the sample completely in the hot water for 15 minutes. Remove the sample to the cold bath and immerse for at least 30 s. Remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. - the time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to beverage containers.	PA33

REMARK.


1. Not reviewed/protocol for test results in this report.

□ □ □ □ □

□ □ □ □ □ □ □ □ □ □

000000 opp 00000024 0/48 0/72 0/144 0000000000000000

□ □

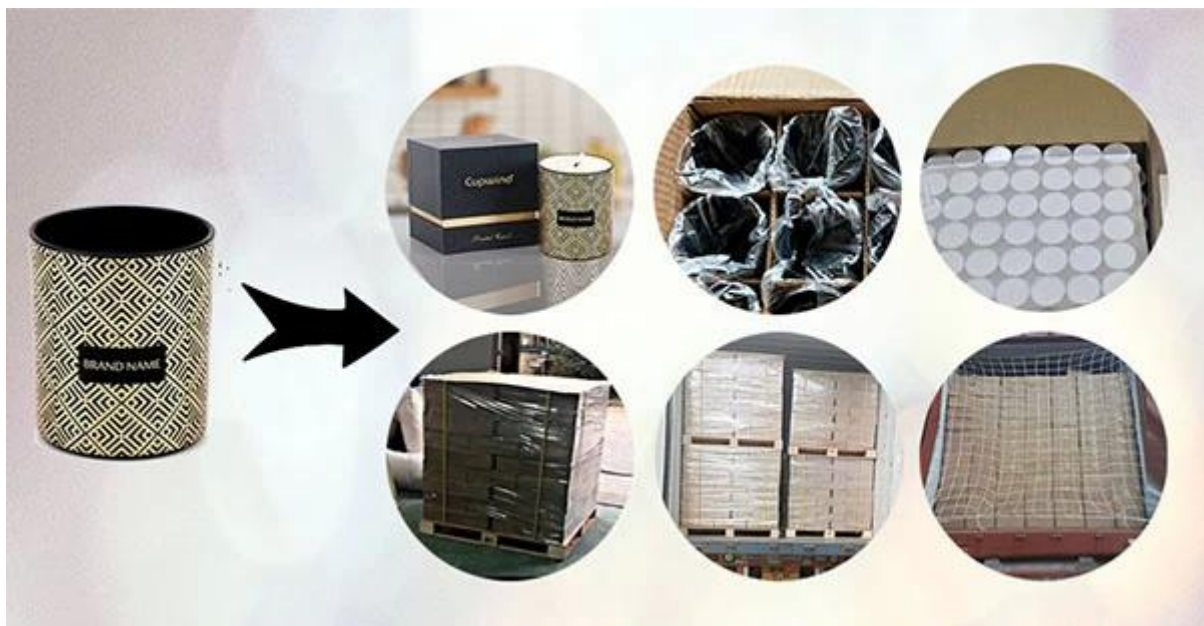

--	--	--	--	--	--	--	--

Cupwind



Wick Trimmer Cutter



Zinc Alloy Lid



Wooden Lid



Neck



Stopper



Reed



Gift Box.



Gift Box