

7 “”



7 “”

7 “” 8.8

7 “”



□□□□

10000□□□□□□

20□□□□□□□□

20□□□□□□

20□□□□□□□□

Armani Zara□□□□□□□□

[□□□□□□ .](#)



Cupwind [Glassware Manufacturer](#) OEM & ODM

[Glassware Manufacturer](#) [Glassware Manufacturer](#) [Glassware Manufacturer](#)

[Glassware Manufacturer](#) [Glassware Manufacturer](#)

[Cupwind Glassware Manufacturer](#) .



TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD
HONGKANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-6435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u>X</u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:		DESCENDANT COATING CANDLE JAR	
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PRV	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Commodity:	DESCENDANT	SKU Number:	11044-0090
Brand Name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☒ No: ☐
Previous Report No.:	/		

EXECUTIVE SUMMARY

Test content		Result Rating	
Ca II, Lead & Cadmium on non-food/beverage glassware surface		Most Pass	
Effectiveness of rinsing	ASTM F2179-90 (Sec. 4.2.3.3.6)	With a largeen carafes, bottle, etc. from the bottom of the article. Then, the article is rinsed with water at the same room temperature as the glass. After 15 minutes, the water and is done. Report the number of fractures, if any, for each test.	M PASS
Thermal shock	ASTM F2179-90 (Sec. 4.2.3.3.6) ASTM D243	Modification: expanded scope to all other glass products in addition to carafes, containers. Procedure: The test is done by placing a glass container in a cold water bath at 21 ± 1°C (70 ± 2°F), then the sample completely in the hot water bath and allow to soak for 30 min ± 10 s. Transfer the sample to the cold bath and immerse for at least 30 s. Remove the sample from the cold bath and examine the sample for any cracking. Note: The hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. The time of transfer from the hot bath to the cold bath shall be 15 ± 5 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to carafes, containers.	M PASS

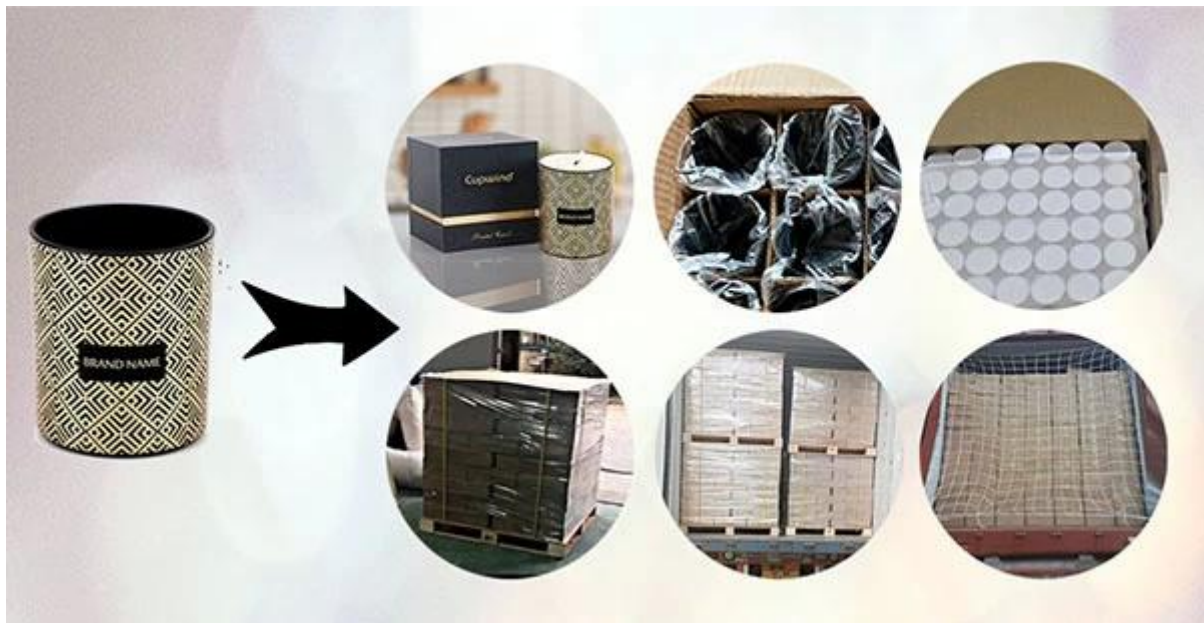
REMARK:

1. Not analyzed/protocol for test results in this report.

□ □ □ □ □

□□□□□□□□□□

□□□□□ opp □□□□□24 □/48 □/72 □/144 □□□□□□□□□□□□

[illegible]

□ □ □ □ □ □ □ □

