


銅、鉄、アルミニウム、ステンレス鋼



銅、鉄、アルミニウム、ステンレス鋼の4種類の金属サンプルを示す。各サンプルは、直径約20mm、高さ約30mmの円筒形状で、表面は光沢があり、色はそれぞれ異なる。

銅サンプル 8 鉄サンプル 8 アルミニウムサンプル 8 ステンレス鋼サンプル 8 2000 円

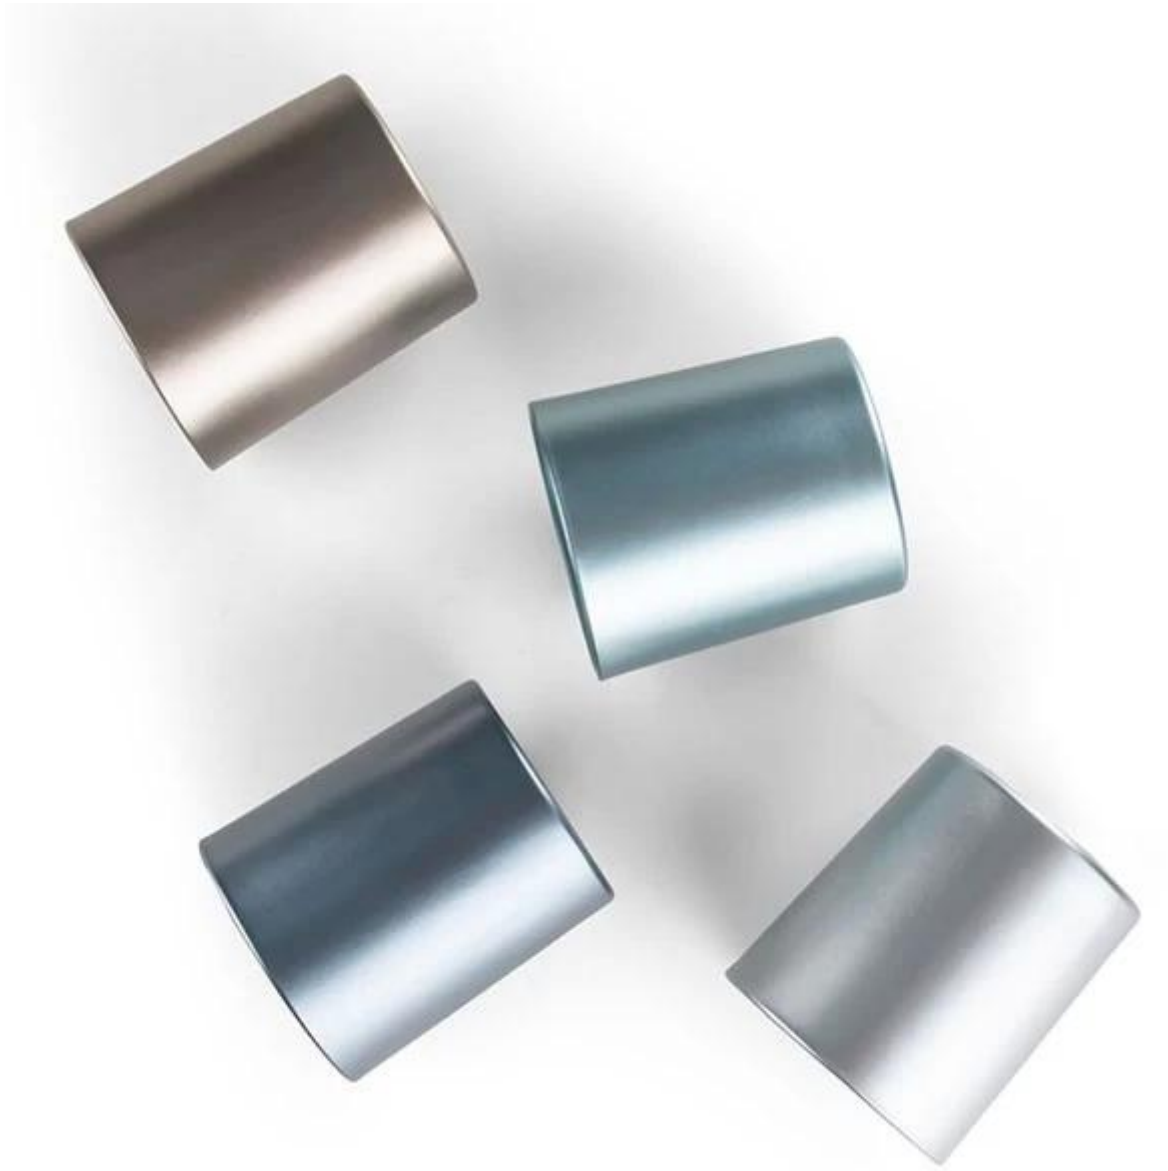

□□□□

10000□□□□□□

20□□□□□□

20□□□□

20□□□□□□

Armani Zara□□□□□□

.



Cupwind 專業 OEM 及 ODM

□ □

□□□□□□□□□□

Cupwind □□□□□□□□□□□□□□ .







TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HONGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-0435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u> X </u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD /
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:		DESCENDANT COATING CANDLE JAR	
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PRV	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Commodity:	DESCENDANT	SKU Number:	11044-0090
Brand Name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☐	Change Vendor:	Yes: ☐ No: ☐
Previous Report No.:	/		



Page 3 of 4

EXECUTIVE SUMMARY

Test content		Result Rating		
CA 10 Label & Calculator on non-food/beverage glassware/enamel		Moist Heat		
Effectiveness of annealing	ASTM F2796-96 Sec. 4.2 (NAI)	With a tungsten-carbide nozzle, scratch twice around the inside rim of the article. Then scratch an "X" across the inside rim made bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Fill article with water at the same room temperature as the glass. Wait 15 minutes. Then empty the water and examine each piece for fractures. Each piece is to fracture, except the number of fractures, if any, for each test.	M	PA33
Thermal shock	ASTM F2796-96 Sec. 4.2 (M2) / ASTM C149	Modification: expanded scope to all other glass products in addition to jar-like containers. Soak test unit in hot water (100°C) for 15 min. Prepare a cold-water bath at 21 ± 1°C (70 ± 2°F). Prepare a hot bath at 71 ± 1°C (160 ± 2°F). Immerse the sample completely in the hot bath and allow it to soak for 15 min. Transfer the sample to the cold bath and immerse for at least 30 s. Remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container throughout the immersion. - the time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to jar-like containers.	M	PA33


REMARK.

1. Not reviewed/protocol for test results in this report.

□ □ □ □ □

□ □ □ □ □ □ □ □ □ □

000000 opp 00000024 0/48 0/72 0/144 0000000000000000

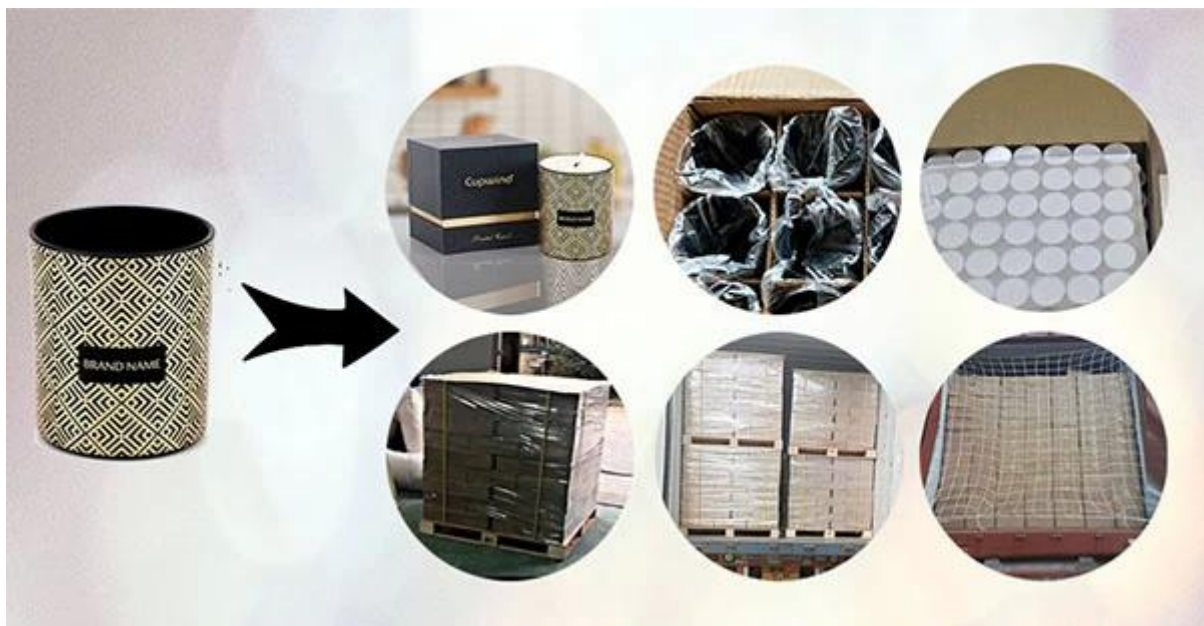[illegible]

--	--	--	--	--	--	--	--

Cupwind



Wick Trimmer Cutter



Zinc Alloy Lid



Wooden Lid



Neck



Stopper



Reed



Gift Box.



Gift Box