



A□ 10000□□□□□□□□

20□□□□□□□□

20□□□□□□

20□□□□□□□□

Armani Zara□□□□□□□□

□□□□□□ [.](#)

□□□□

□□□□□□□□□□□□□□□□


□□□□□□□□ 8 □□□□□□□□□□ 40 □□□

□□□□□ 3M616 □□□□□□□□□□

□□□□□□□□□□□□□□□□

□□□□□□□□□□□□ 2000 □□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□

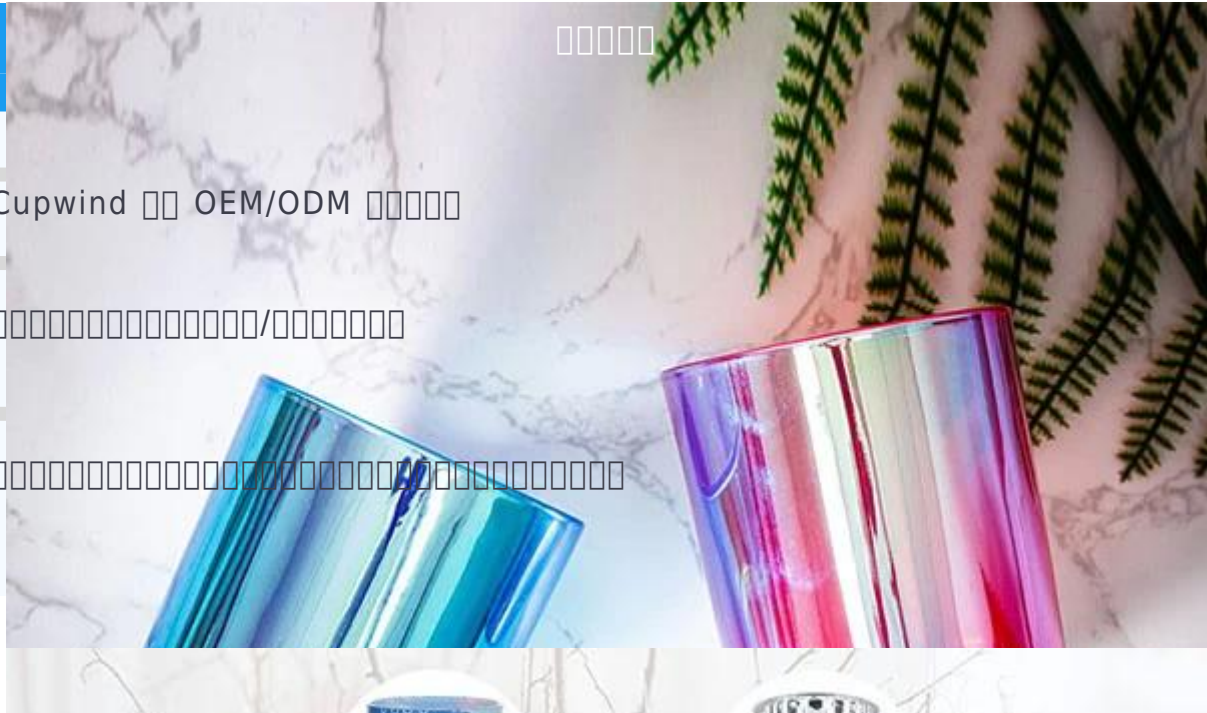

Cupwind 00 OEM/ODM 000000

0000000000000000/00000000

000000000000000000000000000000000000



Wick Trimmer Cutter

Zinc Alloy Lid

Wooden Lid



TEST REPORT



08210870435
Page 3 of 4

000000000000000000000000000000000000

00000000 Call 65 Pro 000000000000000000000000000000000000

ATTN: EMMA ZOU
MOBILE: +86 139 2386 8888
LAB LOCATION: SHENZHEN
LAB NUMBER: 08210870435
DATE OF TEST: APR 10, 2023
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	☒
FAIL	☐
DATA	☐

TESTING FOR Cd Pb LEAD & CADMIUM ON NON-FOOD BEVERAGE GLASSWARE-EXTERIOR

Sample Description: IRIDESCENT COATING CANDLE JAR		Part No:
Buyer:	PSY	Spec:
Country of Origin:	CHINA	Country of Destination:
Color:	IRIDESCENT	SKU Number:
Brand name:	CUPWIND II	ITEM# 8090
Re-test:	Yes: ☐ No: ☒	Change Vendor: Yes: ☒ No: ☐
Previous Report No: 17		

EXECUTIVE SUMMARY:

Test content		Result Rating	
Cd Pb Lead & Cadmium on non-food/beverage glassware-exterior		Used Date	
Electrodes of anvil	ASTM F2179-20 Sec. 4.2 (M4)	With a tungsten carbide scribe, scratch twice around the inside knuckle of the article. Then scratch an "X" across the entire inside bottom surface of the article. An scratcher and 10 be made using sufficient pressure to just penetrate the surface of the glass. Fill each article with water at the same room temperature as the glass. Wait 15 minutes, then empty the water and examine each piece for fractures. Shall show no fractures. Report the number of fractures, if any, for each test.	M PASS
Thermal shock	ASTM F2179-20 Sec. 4.2 (M4) / ASTM C149	Modification: expanded scope to all other glass products in addition to candle containers. Shall not crack or break after tested per below: - prepare a cold water bath at 21± 1.1°C (70 ± 2°F); - prepare a hot bath at 71 ± 1.1°C (160 ± 2°F); - immerse the sample completely in the hot water bath and allow to soak for 5 min ± 15 s; - transfer the sample to the cold bath, and immerse for at least 20 s; - remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container through the second immersion; - the time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to candle containers.	M PASS

REMARK:

1. No enclosed protocol for test results in this report.

Cupwind 001000000000000000000000000000000000

200000000000000000000000000000000000

200000000000000000000000000000000000

200000000000000000000000000000000000

