

Portacandele in vetro satinato con riempimento in cera da 11 once



Il vetro spruzza colore satinato, con un riempimento di cera da 11 once. Questo [portacandele in vetro](#) è realizzato in vetro soda-calcico. Pesante, spessa e resistente, perfettamente usata come vasi di candele.




Portacandele satinati sono sempre più ampiamente utilizzati tra i marchi di candele. In alcuni luoghi definiti, i vasi smerigliati sembrano più di qualità. Alcuni clienti potrebbero pensare che il colore smerigliato si abbini meglio al marchio della loro candela.



Cupwind è un professionista [fornitore di portacandele in porcellana satinata](#) da anni disponiamo di coperchi in legno abbinati per questo Portacandele da 11 once. Il materiale del legno è disponibile in MDF, Pino, Bambù, Faggio, Noce, Paulownia, Acacia, Legno di gomma, Quercia rossa, Quercia bianca, Frassino europeo, Acero ecc.



Cupwind accetta il design personalizzato OEM/ODM. Possiamo creare la tua forma con/senza un marchio. La decorazione disponibile per spruzzatura, galvanica, verniciatura metallica, decalcomania, stampa a caldo, serigrafia, sabbiatura, trasferimento d'acqua ecc.

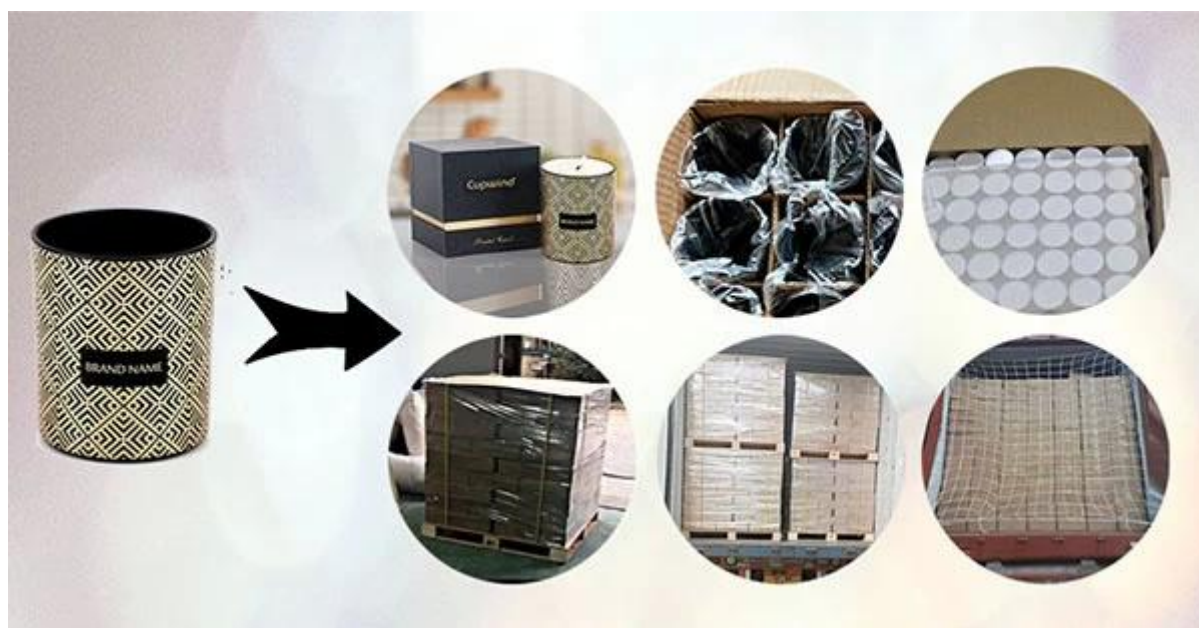

Avvolgiamo ogni bicchiere portacandele da un sacchetto di plastica per tenerlo lontano dalla

polvere, quindi cartoni ondulati con divisori trasversali. I pallet in legno sono sempre efficienti per le spedizioni LCL e aggiungeremo una rete di cotone nella parte della porta per evitare che cadano quando si apre la porta del container.



TEST REPORT



(8521)097-0435
Page 3 of 4

SHENZHEN JIERUIMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HENGGAANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (8521)097-0435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING

PASS ☒
FAIL ☐
DATA ☐

TESTING FOR CA 65 LEAD & CADMIUM ON NON-FOOD / BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	IRIDESCENT COATING CANDLE JAR		
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	IPSY	Style:	/
Country of Origin:	CHINA	Country of Destination:	USA
Color:	IRIDESCENT	SKU Number:	ITEM# 8090
Brand name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☒	Charge Vendor:	Yes: ☒ No: ☐
Previous Report No.:	/		

EXECUTIVE SUMMARY:

Test content		Result/Rating
CA 65 Lead & Cadmium on non-food/beverage glassware-exterior		Meet/Pass
Effectiveness of annealing	ASTM F2179-20 Sec. 4.2 (Mod) With a tungsten carbide scribe, scratch once around the inside knuckle of the article. Then scratch an "X" across the entire inside bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Fill each article with water at the same room temperature as the glass. Wait 15 minutes, then empty the water and examine each piece for fractures. Shall show no fractures. Report the number of fractures, if any, for each test. Modification: expanded scope to all other glass products in addition to candle containers.	M PASS
Thermal shock	ASTM F2179-20 Sec. 4.2 (Mod) / ASTM C149 Shall not crack or break after tested per below - prepare a cold-water bath at $21 \pm 1.1^\circ\text{C}$ ($70 \pm 2^\circ\text{F}$). - prepare a hot bath at $71 \pm 1.1^\circ\text{C}$ ($160 \pm 2^\circ\text{F}$). - immerse the sample completely in the hot water bath and allow to soak for 5 min $\pm$ 10 s. - transfer the sample to the cold bath, and immerse for at least 30 s. - remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container through the second immersion - the time of transfer from the hot bath to the cold bath shall be 15 ± 1 s Modification: sampling procedure not followed and expanded scope to all other glass products in addition to candle containers.	M PASS

REMARK:

- No enclosed protocol for test results in this report.

Tutti i nostri vasetti di candele in vetro sono testati da una terza parte. Di solito andiamo con i test Cali 65 Pro, i test ASTM (ricottura e shock termico), i test sul piombo e sul cadmio.