

5



5

5

10000


20

□□□□□□20□□□□□

20□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□

□ □

A diagram of a 32-bit register. The top row consists of 32 boxes: the first 16 are blue and the last 16 are black. A blue horizontal line connects the bottom of the first 16 blue boxes. Below the 16th box, there are three black boxes.

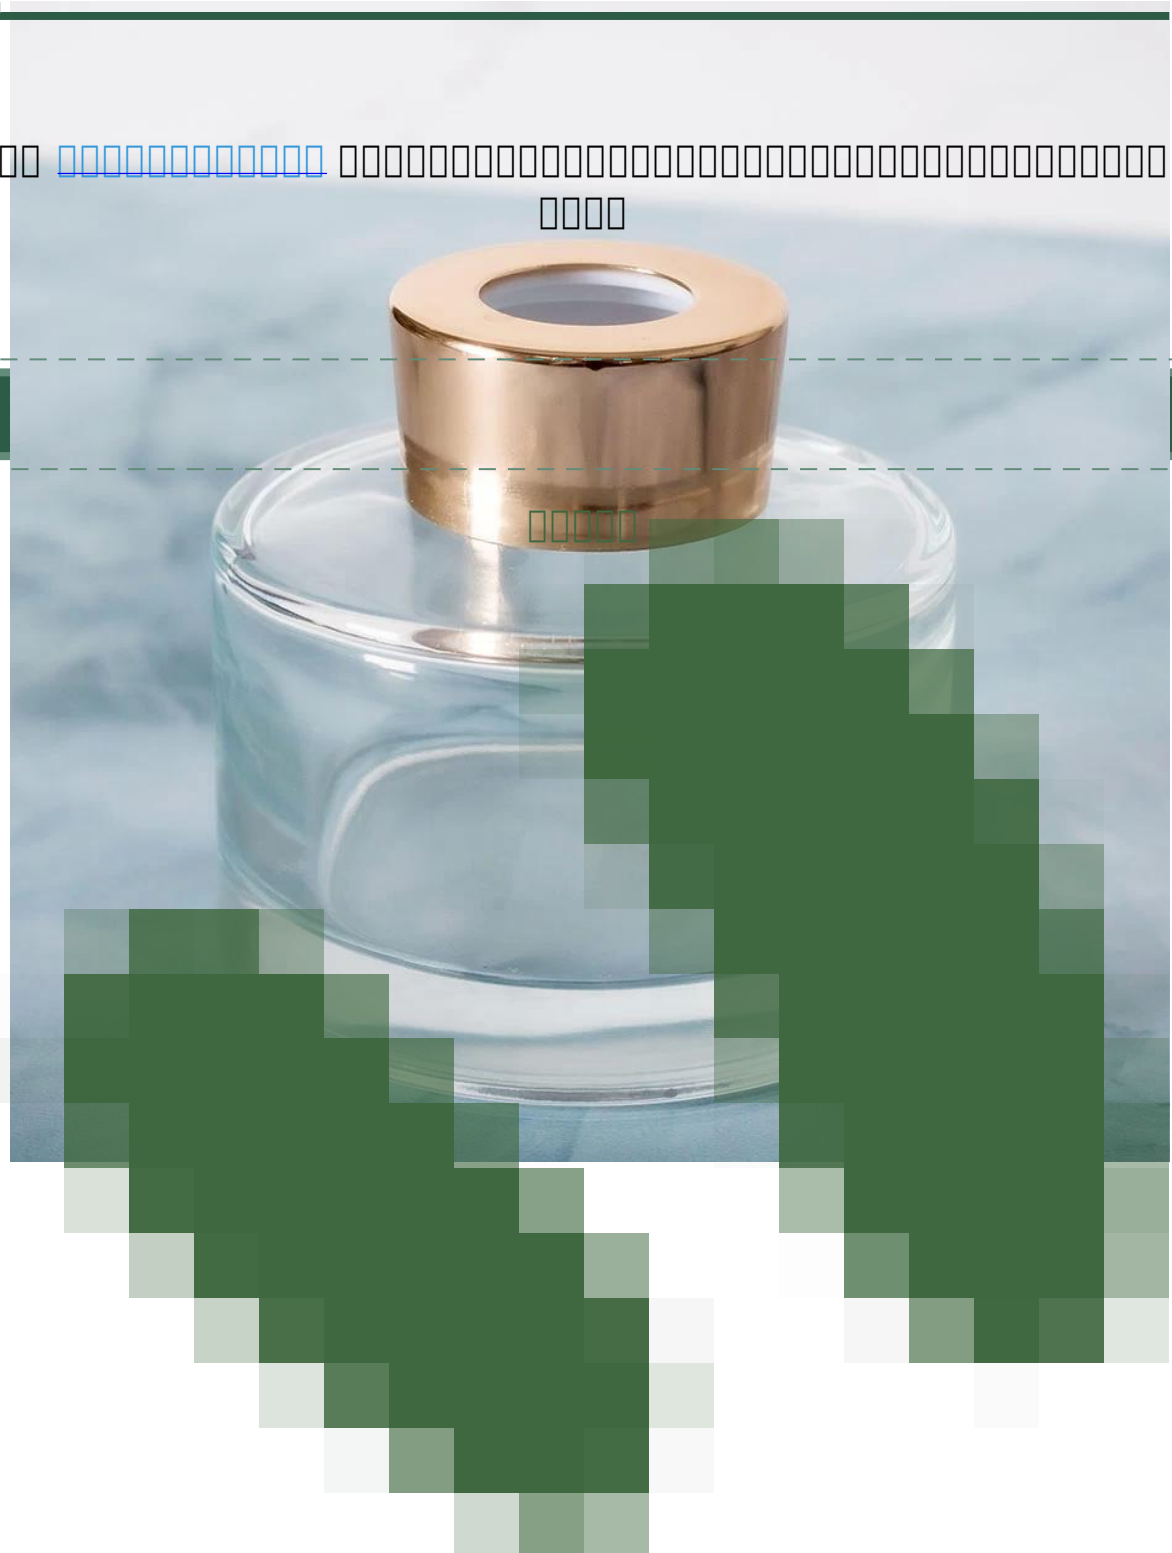



Cupwind OEM / ODM



TEST REPORT



(8521)097-0435
Page 3 of 4

SHENZHEN JIERUIMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HENGGAANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (8521)097-0435

EXECUTIVE SUMMARY:

Test content	Result Rating
CA 65 Lead & Cadmium on non-food beverage glassware-exterior	Most/Pass

ASTM F2179-20 Sec. 4.2 (Mod) / ASTM C149

OVERALL RATING

PASS ☒
FAIL ☐
DATA ☐

TESTING FOR CA 65 LEAD & CADMIUM ON NON-FOOD/ BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	IRIDESCENT COATING CANDLE JAR
Manufacturer:	CUSMIND COORPORATED
Buyer:	IPSY
Country of Origin:	CHINA
Color:	IRIDESCENT
Brand name:	CUPWIND®
Re-test:	Yes: ☐ No: ☒
Previous Report No.:	/

Thermal shock	ASTM F2179-20 Sec. 4.2 (Mod) / ASTM C149	M	PASS
---------------	--	---	------

REMARK:

- No enclosed protocol for test results in this report.



opp
LCL