



□□□□□□□□10000□□□□□□□□


20□□□□□□□□

□□□□□□20□□□□□

20□□□□□□□□□□□□□□□□□□

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

塑料杯

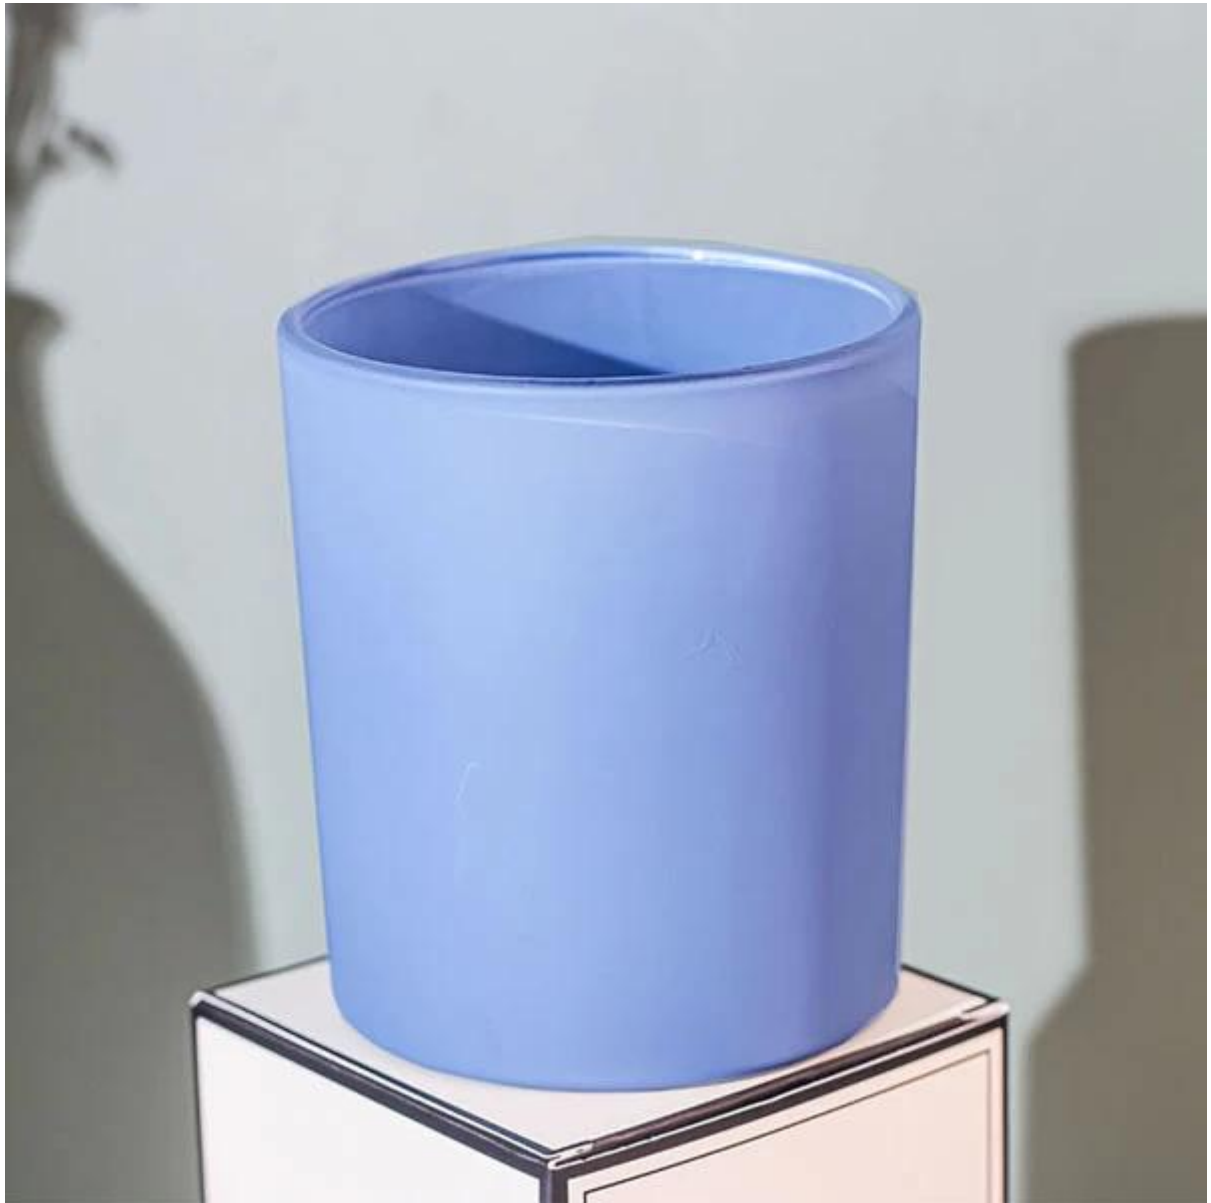

塑料杯

塑料杯 3000 MOQ





歡迎各界人士垂詢、參觀、採購、訂貨、OEM、ODM、

本公司承接各類珠寶首飾、金銀首飾、鑽石首飾、

珠寶首飾、金銀首飾、鑽石首飾、珠寶首飾、

[Cupwind](#)珠寶首飾、金銀首飾、鑽石首飾、

TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HENGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-0435

ATTN: EMMA ZOU
CC: emma@oupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u>X</u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	DESCENDANT COATING CANDLE JAR		
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PSY	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Color:	DESCENDANT	SKU Number:	110Mar 8090
Brand name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☐ No: ☐
Previous Report No.:	/		




Page 3 of 4

EXECUTIVE SUMMARY

Test content		Result/Rating		
CA 161 Lead & Cadmium on non-food/coverglass interface		Moist Pass		
Effectiveness of erasing	ASTM F2179-90 (Sec. 4.2.3 MoC)	Wipe a large-area circular area, scratch-free portion under the inside tracks of the article. Then, scratch an "X" across the inside made bottom surface of the glass. As scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Fill each article with water at the same room temperature as the glass. Wait 15 minutes, thoroughly the water and examine each probe for fractures. That show no fractures. Repeat the number of fractures, if any, for each test.	M	PASS
Thermal shock	ASTM F2179-90 (Sec. 4.2.3 MoC) (3) (b) (2) (4)	Modification: expanded scope to all other glass products in addition to candle containers. Shut out cracks or break after cooled per below prepare a cold-water bath at 21 ± 1.1°C (70 ± 2°F). Prepare a hot bath at 77 ± 1.1°C (160 ± 2°F) enhance the sample completely in the hot bath and allow to soak for 3 min ± 1 s. Transfer the sample to the cold bath, and immerse for at least 30 s. Remove the sample from the cold bath and examine the sample for any cracking. Note: The hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. The time of transfer from the hot bath to the cold bath shall be 15 s ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to candle containers.	M	PASS

REMARK:

1. Full assessment prepared for test results in this report.

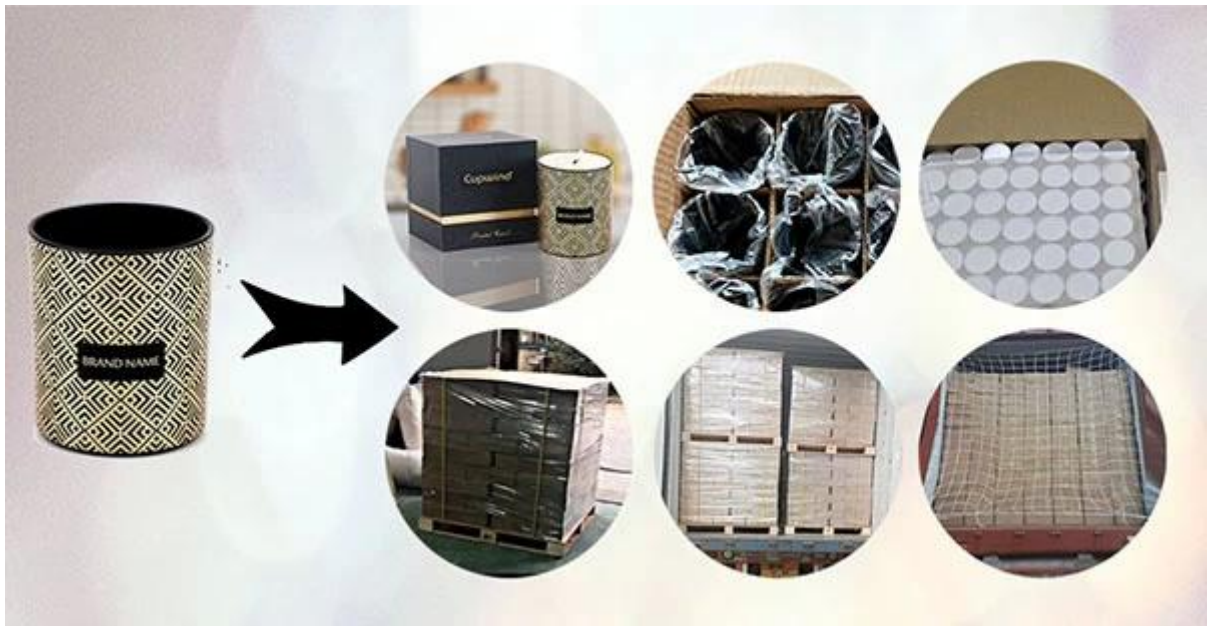

□ □

☐24☐48☐72☐144opp

[illegible]



Cupwind