

D8-3x10-6H



Cupwind

[illegible]

MOQ



□□□□□□

□□□□□□□□□□10000□□□□□□□□

20□□□□□□□□□□

□□□□□□□□20□□□□□□

20□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□

[□□□□□□□□□□□□□□□□□□□□](#)



本公司承接各類OEM、ODM、貼牌、代客加工、

各類產品、各類材料、各類規格、各類顏色、

各類尺寸、各類形狀、各類樣式、

各類產品、各類材料、各類規格、

各類產品

XX

□



TEST REPORT



8521097-0435
Page 3 of 4

SHENZHEN JIERUMA TRADING CO., LTD.
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HENGGAO, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852)097-0435

ATTN: EMMA ZOU
CC: emma@oupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING

PASS X
FAIL
DATA

TESTING FOR CA 95 LEAD & CADMIUM ON NON-FOOD / BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	IRIDESCENT COATING CANDLE JAR		
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	
Buyer:	SPOT	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Color:	IRIDESCENT	SKU Number:	ITEM# 3050
Brand name:	CUPWIND IS		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☒ No: ☐
Previous Report No.:	17		

EXECUTIVE SUMMARY:

Test content		Result Rating
CA 95 Lead & Cadmium on non-food/beverage glassware-exterior		Must Pass
Examination of annealing	ASTM F2175-20 Sec. 4.2 (Mod)	M PASS
With a tapered cerise spike, scratch once around the inside knuckle of the article. Then scratch an "X" across the entire inside bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Fill each article with water at the same room temperature as the glass. Wait 15 minutes, then empty the water and examine each piece for fractures. Shall show no fractures. Report the number of fractures, if any, for each test.		
Thermal shock	ASTM F2175-20 Sec. 4.2 (Mod) / ASTM C149	M PASS
Modification: expanded scope to all other glass products in addition to candle containers. Shall not crack or break after being per below: - prepare a cold water bath at $21 \pm 1.1^\circ\text{C}$ ($70 \pm 2^\circ\text{F}$); - prepare a hot bath at $71 \pm 1.1^\circ\text{C}$ ($160 \pm 2^\circ\text{F}$); - immerse the sample completely in the hot water bath and allow to soak for 1 min $\pm$ 10 s; - transfer the sample to the cold bath, and immerse for at least 30 s; - remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. - the time of transfer from the hot bath to the cold bath shall be 15 $\pm$ 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to candle containers.		

REMARK:


1. No enclosed protocol for test results in this report.

XXXXXXXXXXXXXXXXXXXX

XX

XX24/48/72/144oppXXXXXXXXXXXXXXXXXXXX

XX

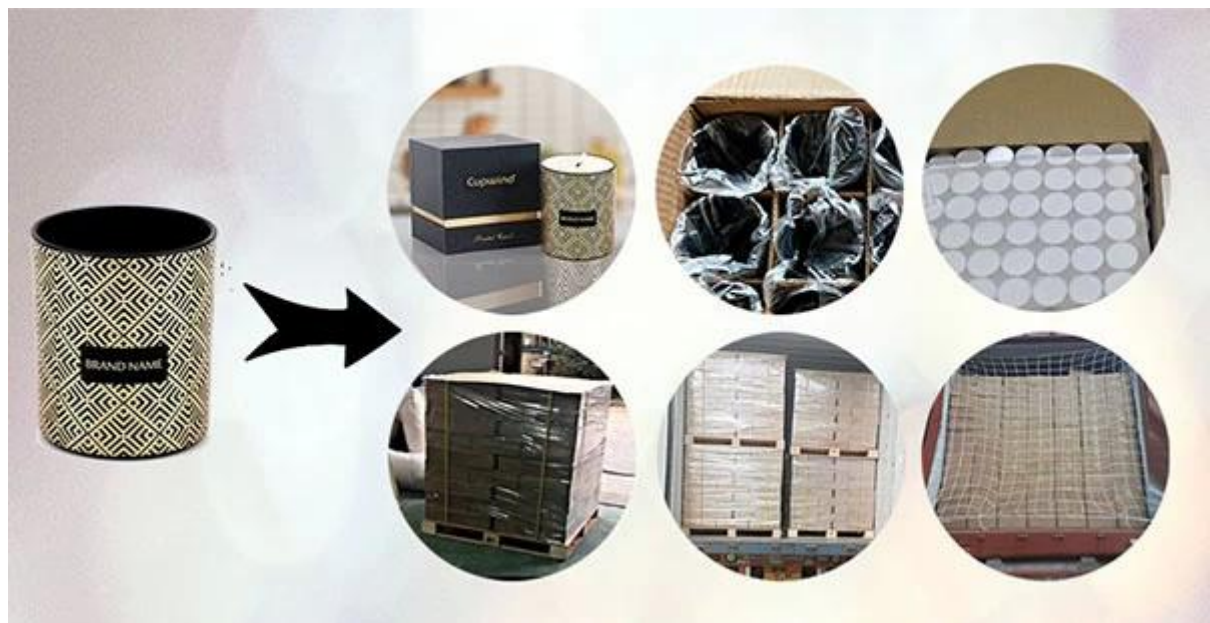

香薰產品清單

Cupwind香薰產品清單



Wick Trimmer Cutter



Zinc Alloy Lid



Wooden Lid



Neck



Stopper



Reed



Gift Box.



Gift Box