

Q



□□□□□□□□□□□□□□□□

□□□□□□□□10000□□□□□□

20□□□□□□□□


□□□□□□20□□□□

20□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□

□□□□

Cupwind OEM / ODM

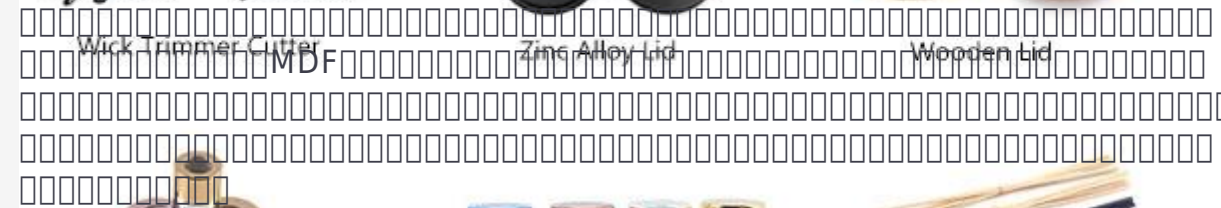

Neck Stopper Reed



TEST REPORT



8521097-0435
Page 3 of 4

TESTING FOR CA 95 LEAD & CADMIUM ON NON-FOOD BEVERAGE GLASSWARE-EXTERIOR	
Sample Description: IRIDESCENT COATING CANDLE JAR	Lab No.: 10000
Country of Origin: CHINA	Country of Destination: USA
Color: IRIDESCENT	SKU Number: ITEM: 8090
Brand name: CUPWIND IS	Re-test: Yes: No: X
Previous Report No.: 7	Charge Vendor: Yes: X No:

OVERALL RATING	
PASS	X
FAIL	
DATA	

EXECUTIVE SUMMARY:	Result Rating: Must Pass		
Examination of marking: ASTM F2175-20: Sec. 4.2 (Mod.)	With a longer outside scriber, scratch twice around the inside knuckle of the article. Then scratch an "X" across the entire inside bottom surface of the article. After marking, the bottom of the article shall be placed in a hot water bath at 21 ± 1 °C (70 ± 2 °F) for 15 minutes. Then remove the article from the bath, wait 15 minutes, then empty the water and examine each piece for fractures. That show no fractures. Report the number of fractures, if any, for each test.	M	PASS
Thermal shock: ASTM F2175-20: Sec. 4.2 (Mod.) / ASTM C149	Modification: expanded scope to all other glass products in addition to candle containers. That not crack or break after tested per below: - prepare a hot bath at 71 ± 1 °C (160 ± 2 °F); - immerse the sample completely in the hot water bath and allow to soak for 1 min ± 15 s; - transfer the sample to the cold bath; and - immerse for at least 30 s; - remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. - the time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to candle containers.	M	PASS

REMARK:
1. No enclosed protocol for test results in this report.

20

20

20

