



10000

20

20

20





☐ OEM ☐ ODM

□ □

□ □

Cupwind□□□□□□□□□□□□□□□□□□□□ □



TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD
HENGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-6435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u>X</u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD /
BEVERAGE GLASSWARE-EXTERIOR

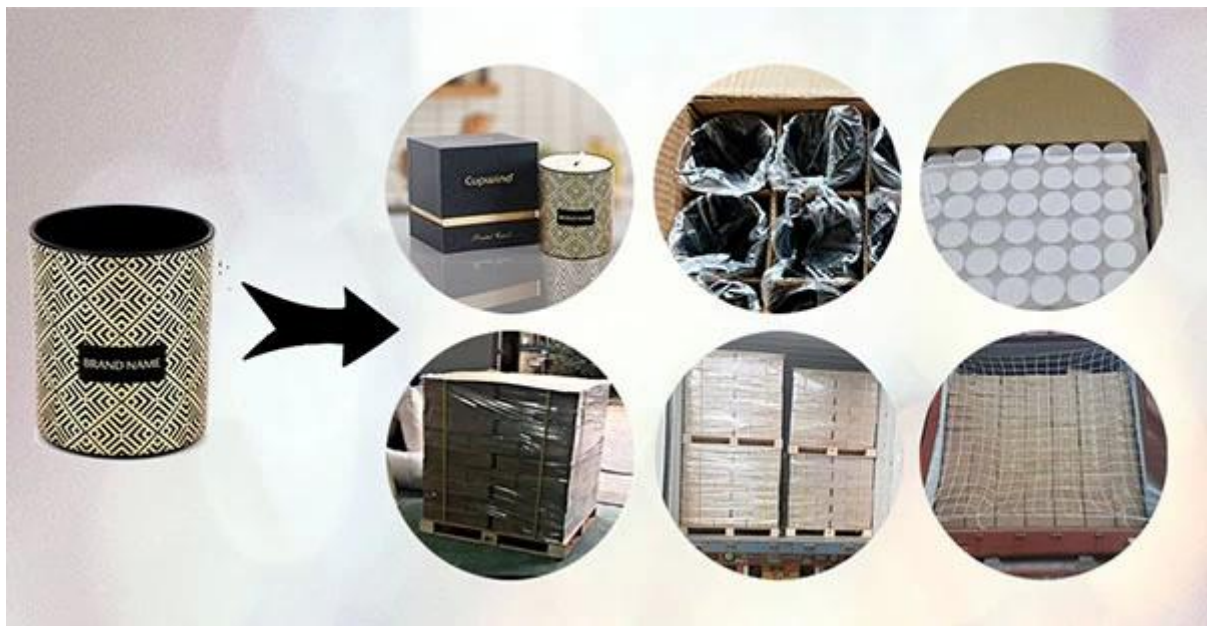
Sample Description:		DESCENDANT COATING CANDLE JAR	
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PRV	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Commodity:	DESCENDANT	SKU Number:	11044-0090
Brand Name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☒ No: ☐
Previous Report No.:	/		

EXECUTIVE SUMMARY

Test content		Result Rating	
Ca II L and Ca II H as Ca II indicators on non-food/beverage glassware surface		Moist Pass	
Effectiveness of rinsing	ASTM F2179-90 (Sec. 4.2.3 MoE)	With a large open carafe or bottle, pour the water from the back cracks of the article. Then pour the water from the inside of the article onto the surface of the article. All surfaces are to be made using sufficient pressure to just penetrate the surface of the glass. Use the article with water at the same room temperature as the glass. Wait 15 minutes, then dry the water and examine each piece for fractures. That area is not fractured. Report the number of fractures, if any, for each test.	M PASS
Thermal shock	ASTM F2179-90 (Sec. 4.2.3 MoE) / ASTM D243	Modification: expanded scope to all other glass products in addition to beverage containers. 1. Fill the container with water and allow water to prepare a cold-water bath at 21 ± 1 °C (70 ± 2 °F). 2. Prepare a hot bath at 71 ± 1 °C (160 ± 2 °F) and immerse the sample completely in the hot water until the sample is at least 3 min in 12 min. 3. Transfer the sample to the cold bath and immerse for at least 30 s. 4. Remove the sample from the cold bath and examine the sample for any cracking. Note: The hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. The time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to beverage containers.	M PASS

REMARK.

1. Not analyzed/protocol for test results in this report.

[illegible]

24 / 48 / 72 / 144 opp

[illegible]



Cupwind