



10000

20

20

20





ODM / OEM



歡迎各界人士垂詢、採購、OEM、ODM、

歡迎各界人士垂詢、採購、OEM、ODM、

歡迎各界人士垂詢、採購、OEM、ODM、

[Cupwind](#) 歡迎各界人士垂詢、採購、OEM、ODM、

TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HONGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-0435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u> X </u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD /
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:		DESCENDANT COATING CANDLE JAR	
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PRV	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Commodity:	DESCENDANT	SKU Number:	11044-0090
Brand Name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☒ No: ☐
Previous Report No.:	/		




Page 3 of 4

EXECUTIVE SUMMARY:

Test content			Result Rating Most Pass
Ca II Leak & Calcium on non-food/beverage glassware surface			
Effectiveness of erasing	AIST P2179-30 (Sec. 4.2.3 Note)	Wipe a large area circular surface, scratch twice from the back cracks of the article. Then position the eraser at the outside bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Wipe the article with water at the same room temperature as the glass. Give 15 minutes, then verify the water and examine each piece for fractures. That area is no longer. Report the number of fractures, if any, for each test.	M PASS
Thermal shock	AIST P2179-30 (Sec. 4.2.3 Subc) / A3 T86 C143	Modification: expanded scope to all other glass products in addition to candle containers. The hot water that collects under the container prepares a cold-water bath at 21±1 °C (70 ± 2°F). Prepare a hot bath at 71 ± 1 °C (160 ± 2°F) whenever the sample collection in the hot water under the container is done. Remove the sample from the hot bath and immerse the sample to the cold bath and immerse for at least 30 s. Remove the sample from the cold bath and examine the sample for any cracking. Note: The hot water that collects under the container during the first immersion shall be retained in the container through the second immersion. The time of transfer from the hot bath to the cold bath shall be 15 ± 5 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to candle containers.	M PASS

REMARK.

1. Not analyzed/protocol for test results in this report.

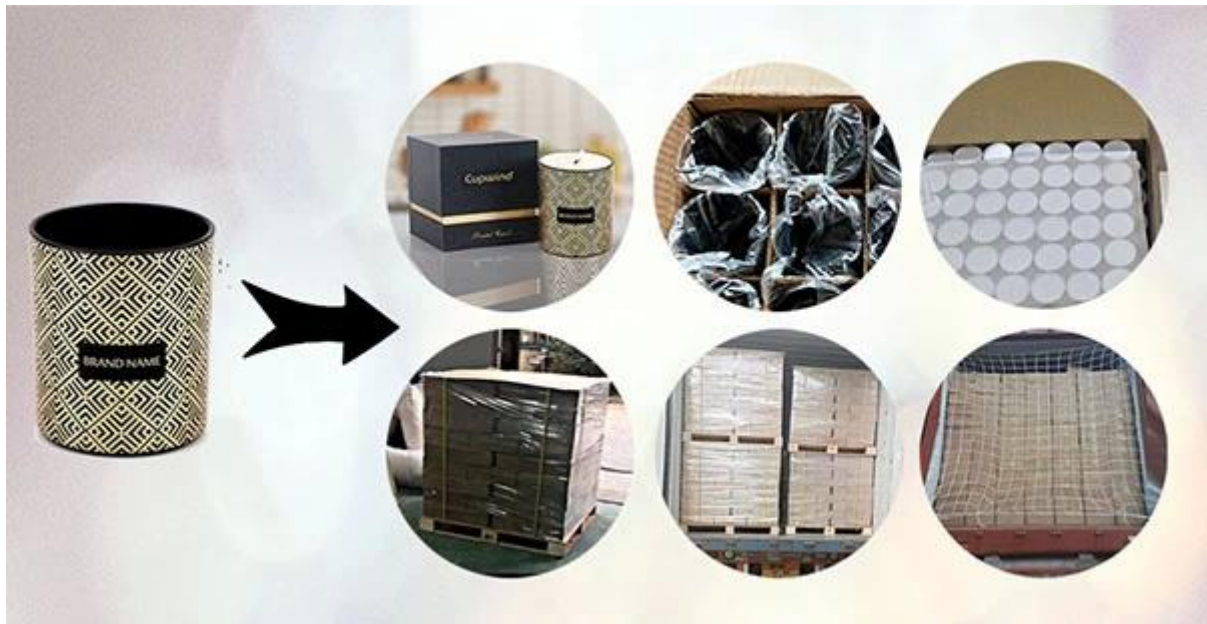

□ □

24 / 48 / 72 / 144 opp

[illegible]



Cupwind