

6ozEmppy

10000

20

20

20



歡迎各界人士垂詢，我們將竭誠為您服務。

歡迎各界人士垂詢，我們將竭誠為您服務。

歡迎各界人士垂詢，我們將竭誠為您服務。



歡迎各界人士垂詢，我們將竭誠為您服務。

歡迎各界人士垂詢，我們將竭誠為您服務。

歡迎各界人士垂詢，我們將竭誠為您服務。





歡迎各界人士垂詢、採購、OEM、ODM、

價格公道、品質優良、交貨迅速、

歡迎各界人士垂詢、採購、

[Cupwind](#) 歡迎各界人士垂詢、採購、

TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD
HONGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-0435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u>X</u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:		DESCENDANT COATING CANDLE JAR	
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PRV	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Commodity:	DESCENDANT	SKU Number:	11044-0090
Brand Name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☒ No: ☐
Previous Report No.:	/		



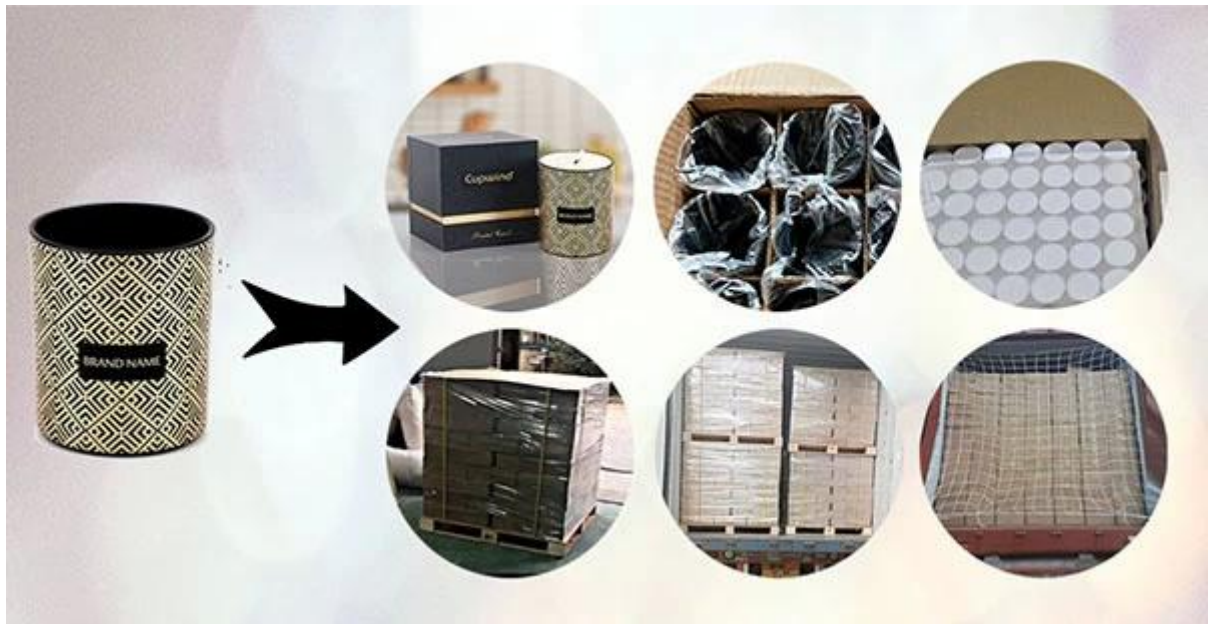
Page 3 of 4

EXECUTIVE SUMMARY

Test content		Result Rating
Ca II L-Leu & Cadmium on non-food/overage glassware inference		Most Pass
Effectiveness of rinsing	ASTM F2179-90 (Sec. 4.2.3.3.6)	M PASS
Thermal shock	ASTM F2179-90 (Sec. 4.2.3.3.6) & ASTM C149	M PASS
	With a large open carafe or bottle, pourish once from the back knuckle of the article. Then position the article inside the carafe/bottle bottom surface of the article. All surfaces are to be made using sufficient pressure to just penetrate the surface of the glass. The article with water at the same room temperature as the glass. Give 15 minutes, then empty the water and examine each piece for fractures. That area is not broken. Report the number of fractures, if any, for each test. Modification: expanded scope to all other glass products in addition to carafe containers. ASTM C149 is broken after the water is added, prepare a cold water bath at 21± 1.1°C (70± 2°F). Prepare a hot bath at 71 ± 1.1°C (160 ± 2°F) immerse the sample completely in the hot water and allow time to soak for 30 min ± 12 s, transfer the sample to the cold bath and immerse for at least 30 s. Remove the sample from the cold bath and examine the sample for any cracking. Note: The hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. The time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to carafe containers.	

REMARK.

1. Not reviewed/protocol for test results in this report.

[illegible]

24/ 48/ 72/ 144 opp

