

Elegant Home Fragrance Ceramic Diffuser Bottle With Flower Lid



Cupwind is experienced [China ceramic diffuser bottle supplier](#), we supply diffuser bottles both in glass material and ceramic material. The MOQ for ceramic diffuser bottle can be as low as 2000pcs, different shape, size and lids can be customized.



The big diffuser bottle in classic round shape, it hold 25oz oil fragrance. The rounded shape with cross stripe pattern white ceramic diffuser bottle is perfect for room decoration.



As [China ceramic diffuser bottle factory](#), Cupwind will always provide fashion and special products to make your brand unique. For this diffuser bottle, we have a flower lid decorated on, we can custom the color and size as you required.



Wick Trimmer Cutter



Zinc Alloy Lid



Wooden Lid



Neck



Stopper



Reed





Gift Box.



Gift Box

Except for ceramic lid, we do also supply other accessories for diffuser bottles, like stoper, plug, reed, gift box, etc

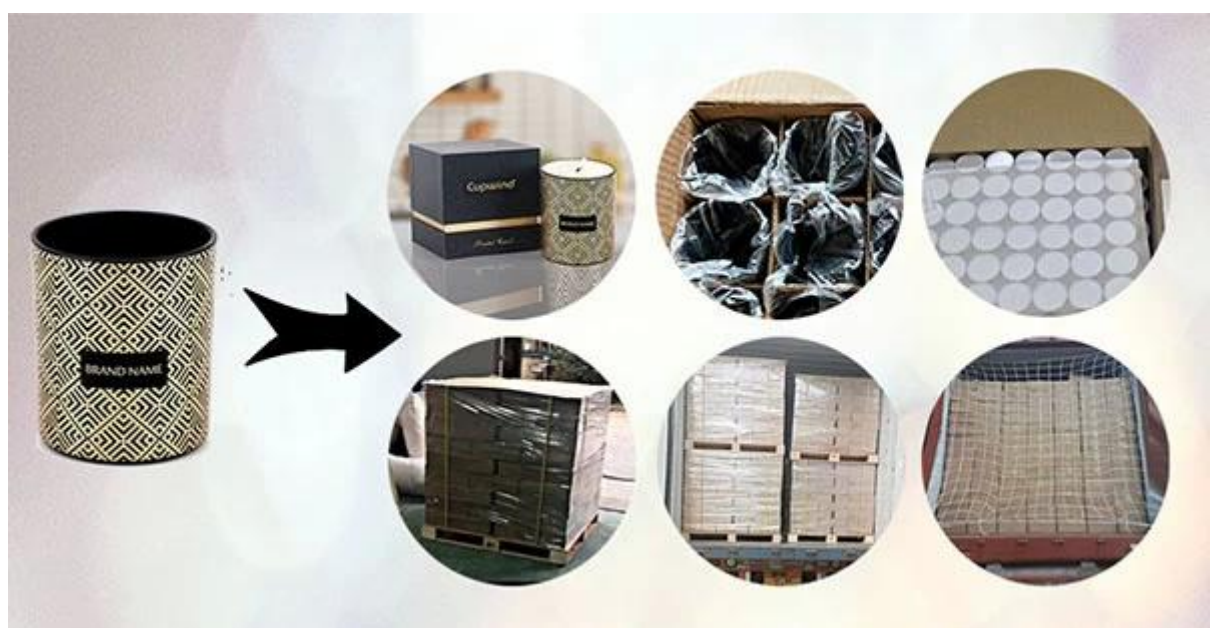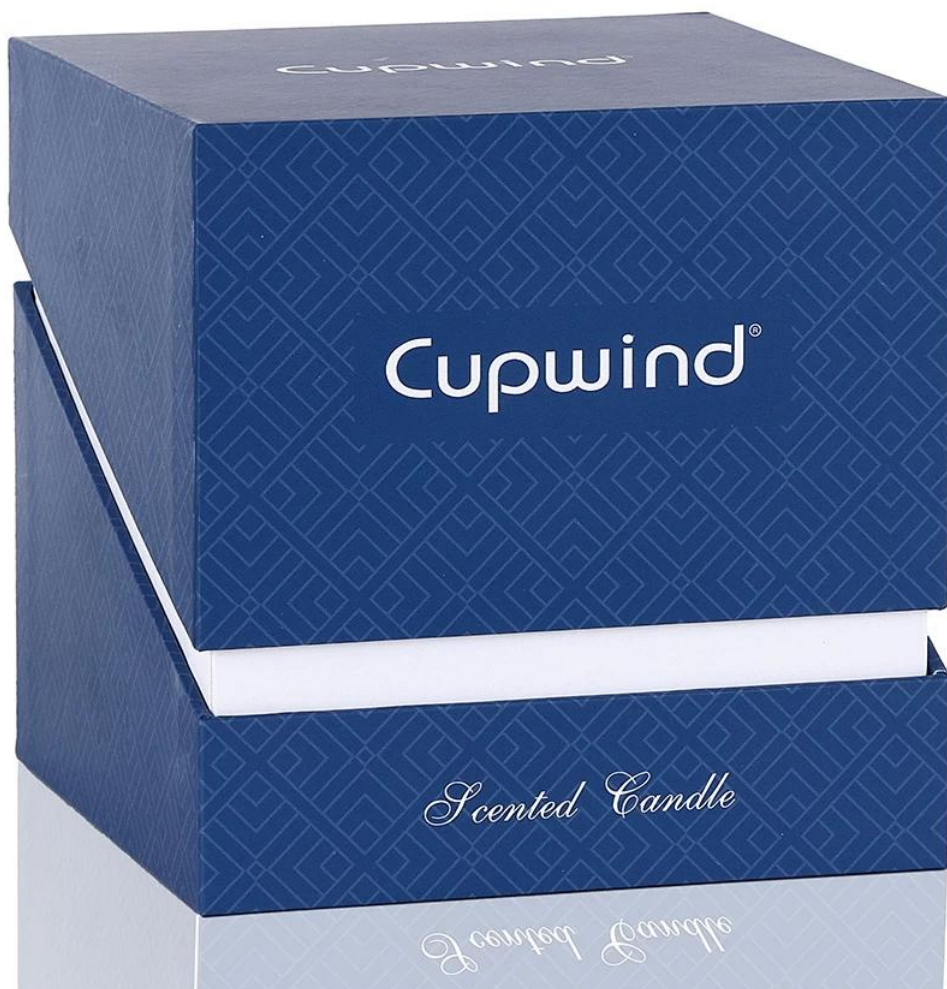

We wrap each product by an opp bag to keep away from dust, then corrugated cartons with cross board dividers. Wooden pallets are always efficient for LCL shipments, and we will add a cotton net in the door place to protect from falling when opening the container door.



TEST REPORT



(8521)097-0435
Page 3 of 4

SHENZHEN JIERUIMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HENGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (8521)097-0435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING

PASS ☒ X
FAIL ☐
DATA ☐

TESTING FOR CA 65 LEAD & CADMIUM ON NON-FOOD/ BEVERAGE GLASSWARE-EXTERIOR

| | | | |
|----------------------|---|-------------------------|---|
| Sample Description: | IRIDESCENT COATING CANDLE JAR | | |
| Manufacturer: | CUPWIND COOPERATED FACILITY | P.O. No.: | / |
| Buyer: | IPSY | Style: | / |
| Country of Origin: | CHINA | Country of Destination: | USA |
| Color: | IRIDESCENT | SKU Number: | ITEM# 8090 |
| Brand name: | CUPWIND® | | |
| Re-test: | Yes: <input type="checkbox"/> No: <input checked="" type="checkbox"/> X | Charge Vendor: | Yes: <input checked="" type="checkbox"/> X No: <input type="checkbox"/> |
| Previous Report No.: | / | | |

EXECUTIVE SUMMARY:

| Test content | | Result Rating | |
|--|---|--|--------|
| CA 65 Lead & Cadmium on non-food/beverage glassware-exterior | | Meet/Pass | |
| Effectiveness of annealing | ASTM F2179-20 Sec. 4.2 (Mod) | With a tungsten carbide scribe, scratch once around the inside knuckle of the article. Then scratch an "X" across the entire inside bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Fill each article with water at the same room temperature as the glass. Wait 15 minutes, then empty the water and examine each piece for fractures. Shall show no fractures. Report the number of fractures, if any, for each test. | M PASS |
| Thermal shock | ASTM F2179-20 Sec. 4.2 (Mod)/ ASTM C149 | Modification: expanded scope to all other glass products in addition to candle containers. - Shall not crack or break after limited per below - prepare a cold-water bath at 21±1.1°C (70±2°F). - prepare a hot bath at 71±1.1°C (160±2°F) - Immerse the sample completely in the hot water bath and allow to soak for 5 min ± 10 s. - transfer the sample to the cold bath, and immerse for at least 30 s. - remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container through the second immersion - the time of transfer from the hot bath to the cold bath shall be 15 ± 1 s Modification: sampling procedure not followed and expanded scope to all other glass products in addition to candle containers. | M PASS |

REMARK:

- No enclosed protocol for test results in this report.

All of our glass candle jar are tested by a third party. Usually we go with Cali 65 Pro tests, ASTM (Annealing and Thermal Shock) tests, Lead and Cadmium tests.