


9x6.5cm □□□□□□ □□□□ □□□□

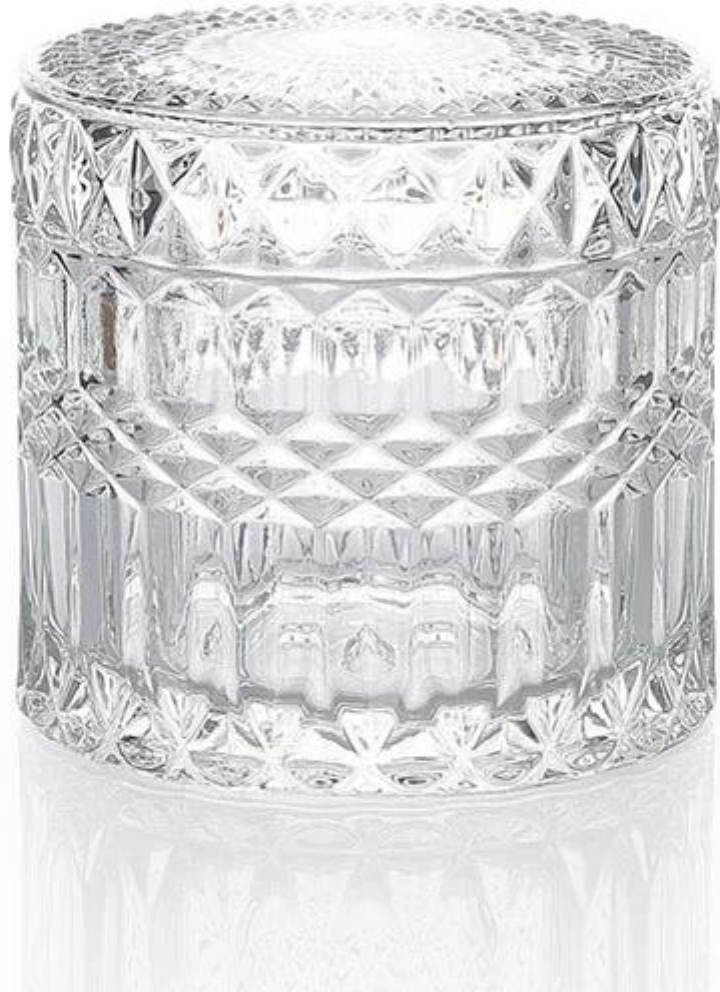

□□□□ □□□□ □□□□ □□□ □ □□□□□□□□ □□□□□□□□ □□□□□□□□ □□□□□ □□□□□ □□□□ □□ □□ □□□□□□ □□□□□□ □□□□ □□□□□ □□□□□ □□.

□□□□□ 8.8 □□□□□ □□□□□□ □□□ □□□□□ □□ □□□□□ □□ □□□□□ 7 □□□□□ □□□□□□ □□□ □□□□□.

□□□□□□ □□□ □ □□□□□□□□□□ □□□ □ □□□□□□□ □□□□□ □□□ □ □□□□□□ □□□ □□□ □□□□□□ □□□□□□□□□□ □□□ □□□ □□□□□□□□.



□□□□

□□□□ □□ 10000 □□□□ □□□□.

20 □□□□□□□□ □□□□□□ □□□□ □□ □□□□.

20 □□□□□□□□ □□□□ □□ □□□□□□ □□ □□□□.

20 □□□□ □□□□ □□□□ □□□□.

□□□ □□□□ □□□□ □□□□□□□□ □□□□□□□□ Armani Zara □□□.

[Cupwind](#) □□□□□ □□ .




我們 Cupwind 專業生產 各種 玻璃 OEM 及 ODM 玻璃器皿。

玻璃器皿 玻璃器皿 玻璃器皿 玻璃 玻璃器皿 玻璃器皿 玻璃 玻璃器皿 玻璃 玻璃器皿 玻璃。

玻璃器皿 玻璃器皿 玻璃器皿 玻璃 玻璃器皿 玻璃器皿 玻璃器皿。

[Cupwind](#) 及 玻璃器皿 玻璃器皿 玻璃器皿 玻璃器皿 玻璃器皿 。







TEST REPORT



8521097-0435
Page 3 of 4

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HENGGAO, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: 8521097-0435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	☒
FAIL	☐
DATA	☐

TESTING FOR CA 95 LEAD & CADMIUM ON NON-FOOD BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	IRIDESCENT COATING CANDLE JAR		
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	POST	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Color:	IRIDESCENT	SKU Number:	ITEM# 8090
Brand name:	CUPWIND IS		
Re-test:	Yes: ☐ No: ☒	Charge Vendor:	Yes: ☒ No: ☐
Previous Report No.:	/		

EXECUTIVE SUMMARY:

Test content		Result Rating	
CA 95 Lead & Cadmium on non-food/beverage glassware-exterior		Meet Pass	
Effectiveness of annealing	ASTM F2175-20 Sec. 4.2 (Mod)	With a larger needle or wire, scratch area around the inside knuckle of the article. Then scratch an "X" across the entire inside bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Fill each article with water at the same room temperature as the glass. Wait 15 minutes, then empty the water and examine each piece for fractures. That show no fractures. Report the number of fractures, if any, for each test.	M PASS
Thermal shock	ASTM F2175-20 Sec. 4.2 (Mod) / ASTM C149	Modification: expanded scope to all other glass products in addition to candle containers. That not crack or break after tested per below: prepare a cold water bath at 21±1.1°C (70±2°F); prepare a hot bath at 71±1.1°C (160±2°F); immerse the sample completely in the hot water bath and allow to soak for 1 min ± 15 s; transfer the sample to the cold bath; and immerse for at least 30 s; remove the sample from the cold bath and examine the sample for any cracking. Note: the hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. The time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to candle containers.	M PASS

REMARK:

1. No enclosed protocol for test results in this report.

XXXXXXXXXXXXXXXXXXXX

XXXXXXXX Cupwind XXXXX XXXXXXXX XXXXXXXX XX XXXXX XXX.

XX XXXXX 144 / XXXXX 72 / XXXXX 48 / XXXXX 24 XXXXXXX XXX X XXXXXXX XXXXXXXXXX XXXXX XXXXX XXXXX XX XXXXXXX XXX
XXXX XXXXXXX XX XXXXXXX XXXXXXX.

XXXX XXXXX XX XXXXXXX XXXXX XXXXXXX XXXXXXX X XXXXXXXXXX XX X XXXXXXXXXX XXXXXXXXXX XXXXX XXXXXXX XXXXXXX XXXXXXXXXX
XXXXXXXXXX XX XXXXXXX XXXXXXX.

