



[illegible][illegible]

3 000000 000000 000000 000000 00000 M 00000000.





我們是 Cupwind 的 ODM / OEM 工廠，我們提供各種樣式的燈罩，並提供各種樣式的燈罩，並提供各種樣式的燈罩，並提供各種樣式的燈罩。我們提供各種樣式的燈罩，並提供各種樣式的燈罩，並提供各種樣式的燈罩，並提供各種樣式的燈罩。



我們 Cupwind 提供 各種 尺寸 OEM 及 ODM 服務。

歡迎 各界 人士 垂詢 價格 詳情 歡迎 隨時 與 我們 聯絡 。

歡迎 各界 人士 垂詢 價格 詳情 歡迎 隨時 與 我們 聯絡 。

[Cupwind](#) 及 各種 尺寸 價格 詳情 歡迎 隨時 與 我們 聯絡 。



TEST REPORT



8521097-0435
Page 3 of 4

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHEN ROAD,
HENGGAO, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: 8521097-0435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	☒
FAIL	☐
DATA	☐

TESTING FOR CA 95 LEAD & CADMIUM ON NON-FOOD / BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	IRIDESCENT COATING CANDLE JAR		
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PST	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Color:	IRIDESCENT	SKU Number:	ITEM# 8090
Brand name:	CUPWIND IS		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☐ No: ☐
Previous Report No.:	/		


EXECUTIVE SUMMARY:

Test content		Result Rating	
CA 95 Lead & Cadmium on non-food/beverage glassware-exterior		Meet Pass	
Electrodes of annealing	ASTM F2179-20 Sec. 4.2 (Mod)	With a sharpened needle, scratch twice around the inside knuckle of the article. Then scratch an "X" across the entire inside bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Fill each article with water at the same room temperature as the glass. Wait 15 minutes, then empty the water and examine each piece for fractures. Shall show no fractures. Report the number of fractures, if any, for each test.	M PASS
Thermal shock	ASTM F2179-20 Sec. 4.2 (Mod) / ASTM C149	Modification: expanded scope to all other glass products in addition to jar/candle containers. That not crack or break after tested per below: - prepare a cold water bath at 21.1 ± 1.1°C (70 ± 2°F); - prepare a hot bath at 71 ± 1.1°C (160 ± 2°F); - immerse the sample completely in the hot water bath and allow to soak for 1 min ± 15 s; - transfer the sample to the cold bath; and - immerse for at least 30 s; - remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container through the second immersion. - the time of transfer from the hot bath to the cold bath shall be 15 ± 1 s. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to jar/candle containers.	M PASS

REMARK:

1. No enclosed protocol for test results in this report.

此份報告係根據客戶提供之樣品進行測試，所有測試結果均基於樣品之實際情況。如有任何疑問，請與客戶代表聯繫。此份報告僅供參考，不作為法律依據。

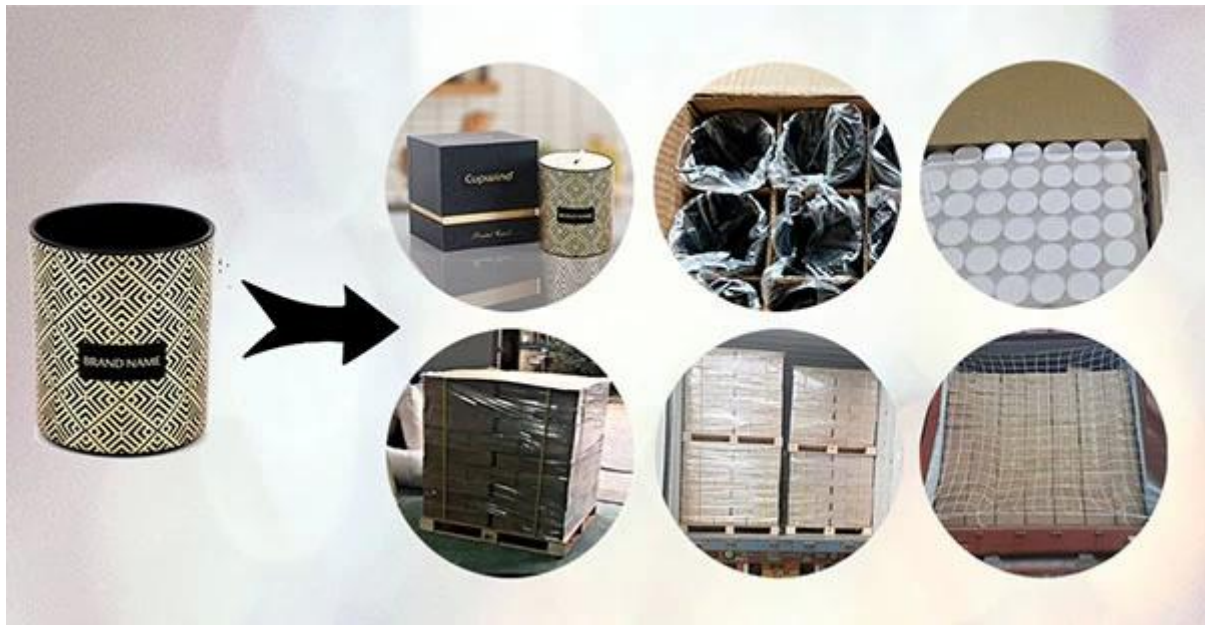

此份報告係根據客戶提供之樣品進行測試，所有測試結果均基於樣品之實際情況。如有任何疑問，請與客戶代表聯繫。此份報告僅供參考，不作為法律依據。

此份報告係根據客戶提供之樣品進行測試，所有測試結果均基於樣品之實際情況。如有任何疑問，請與客戶代表聯繫。此份報告僅供參考，不作為法律依據。

此份報告係根據客戶提供之樣品進行測試，所有測試結果均基於樣品之實際情況。如有任何疑問，請與客戶代表聯繫。此份報告僅供參考，不作為法律依據。

[illegible]

Wick Trimmer Cutter



Zinc Alloy Lid



Wooden Lid



Neck



Stopper



Reed



Gift Box.



Gift Box

□□□□□□ □□□□□□ □□□□□ □□□□ □□□□□□□□□□

[illegible]