

حامل شمعة نذري رش 8 أوقية



دائمًا عن حرفة جديدة وديكورات جديدة Cupwind كما من ذوي الخبرة [الصين المورد حامل شمعة نذري](#)، تبحث لجعل حاملات الشموع مختلفة. تم تطوير رذاذ مزيج الألوان هذا حديثًا ، وهو مناسب لملء 8 أونصات بالشمع. كل الطلاب الذي نستخدمه صديق للبيئة وصديق للبيئة.



وعاء الشمعة سعة 8 أونصات هو حجم شائع يستخدمه صانعو الشموع ، وهو حجم مثالي لسفينة نذرية. إنه عنصر بالمخزون على مدار السنة. يمكن أن يكون موك لهذا Cupwind إنتاج منتظم في ورشة العمل الخاصة بنا. يحتفظ الزجاج منخفضًا يصل إلى 2000 قطعة لكل لون.



الصنوبر ، ، MDF لدينا غطاء خشبي متطابق وغطاء معدني لهذا 8أوقية شمعة حامل نذري. مادة الخشب متوفرة في الخيزران ، الزان ، الجوز ، بولونيا ، الأكاسيا ، خشب المطاط ، البلوط الأحمر ، البلوط الأبيض ، الرماد الأوروبي ، القيقب إلخ. مادة المعدن متوفرة في القصدير ، الفولاذ المقاوم للصدأ ، الزنك سبيكة إلخ.



تصميم مخصص. يمكننا إنشاء الشكل OEM / ODM هو الرائد [الصين مصنع حامل شمعة نذري](#)، نحن نقبل Cupwind الخاص بك مع / بدون اسم العلامة التجارية. الزخرفة المتاحة للرش ، والطلاء الكهربائي ، والطلاء المعدني ، والشارات ، والختم الساخن ، والشاشة الحرارية ، والرمل ، ونقل المياه ، إلخ.



Wick Trimmer Cutter



Zinc Alloy Lid



Wooden Lid



Neck



Stopper



Reed




Gift Box.



Gift Box

هناك المزيد من إكسسوارات الشموع التي يمكننا توريدها إلى جانب الأغذية الخشبية. يمكننا بيع المنتجات النهائية مع

الشموع وعلب الهدايا عند الطلب.

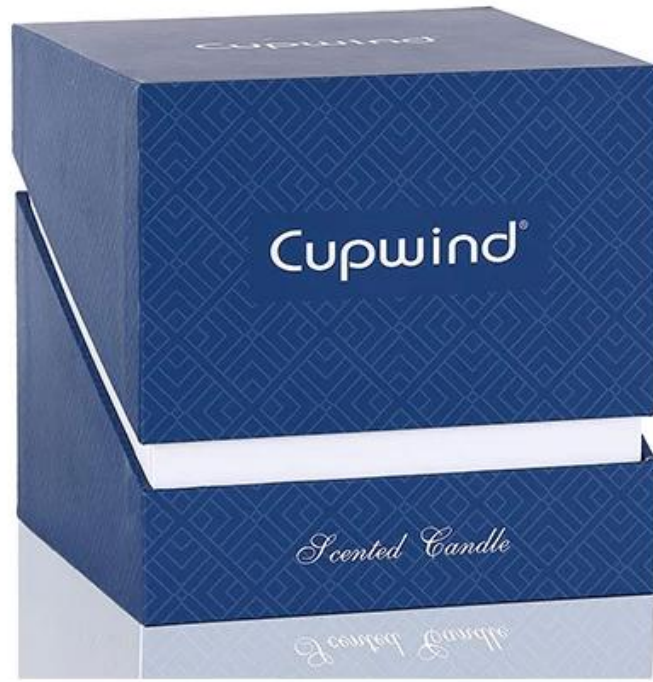

نقوم بلف كل زجاج شمعة بواسطة كيس مقابل للابتعاد عن الغبار ، ثم نقوم بلف الكراتين المموجة بفواصل الألواح وسنضيف شبكة قطنية في مكان الباب للحماية من ، LCL العرضية. دائمًا ما تكون المنصات الخشبية فعالة لشحنات السقوط عند فتح باب الحاوية.



TEST REPORT



(8521)097-0435
Page 3 of 4

SHENZHEN JIERUIMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD,
HENGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (8521)097-0435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING

PASS _____ X
FAIL _____
DATA _____

TESTING FOR CA 65 LEAD & CADMIUM ON NON-FOOD / BEVERAGE GLASSWARE-EXTERIOR

Sample Description:	IRIDESCENT COATING CANDLE JAR
Manufacturer:	CUPWIND COOPERATED P.O. No.: /
Buyer:	IPSY Style: /
Country of Origin:	CHINA Country of Destination: USA
Color:	IRIDESCENT SKU Number: ITEM# 8090
Brand name:	CUPWIND®
Re-test:	Yes: No: X Charge Vendor: Yes: X No: /
Previous Report No.:	/

EXECUTIVE SUMMARY:

Test contents CA 65 Lead & Cadmium on non-food/beverage glassware-exterior			Result/Rating Meet/Pass	
Effectiveness of annealing	ASTM F2179-20 Sec. 4.2 (Mod)	With a tungsten carbide scribe, scratch once around the inside knuckle of the article. Then scratch an "X" across the entire inside bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Fill each article with water at the same room temperature as the glass. Wait 15 minutes, then empty the water and examine each piece for fractures. Shall show no fractures. Report the number of fractures, if any, for each test. Modification: expanded scope to all other glass products in addition to candle containers.	M	PASS
Thermal shock	ASTM F2179-20 Sec. 4.2 (Mod) / ASTM C149	Shall not crack or break after tested per below prepare a cold-water bath at $21 \pm 1.1^{\circ}\text{C}$ ($70 \pm 2^{\circ}\text{F}$). - prepare a hot bath at $71 \pm 1.1^{\circ}\text{C}$ ($160 \pm 2^{\circ}\text{F}$) - immerse the sample completely in the hot water bath and allow to soak for $5 \text{ min} \pm 10 \text{ s}$. - transfer the sample to the cold bath, and immerse for at least 30 s. - remove the sample from the cold bath and examine the sample for any cracking. Note: - the hot water that collects within the container during the first immersion shall be retained in the container through the second immersion - the time of transfer from the hot bath to the cold bath shall be $15 \pm 1 \text{ s}$ Modification: sampling procedure not followed and expanded scope to all other glass products in addition to candle containers.	M	PASS

REMARK:

1. No enclosed protocol for test results in this report.

Cali 65 Pro يتم اختبار كل برطمان الشمع الزجاجي الخاص بنا من قبل طرف ثالث. عادة ما نذهب مع اختبارات التلدين والصدمة الحرارية) واختبارات الرصاص والكاديوم) ASTM واختبارات