

10x10cm15oz



10000

10000

20

20

20

10000

Page 10 of 10

[illegible]

□□□□□MOQ□30000□□□□□□□□□□□□□□□□

[illegible]





歡迎各界人士垂詢、採購、OEM、ODM、
本公司承接各類醫療器械、
歡迎各界人士垂詢、採購、
[Cupwind](#) 歡迎各界人士垂詢、採購、

TEST REPORT

SHENZHEN JIERUMA TRADING CO., LTD
NO.415 RUNLIAN BUILDING, SHENZHU ROAD
HONGANG, 518115, SHENZHEN, CHINA

LAB LOCATION: SHENZHEN
LAB NUMBER: (852) 3087-0435

ATTN: EMMA ZOU
CC: emma@cupwind.com

DATE IN: APR 07, 2021
MOD. LOG IN: /
DATE OUT: APR 13, 2021
REVISED DATE: /
WORKING DAYS: 5
PAGE: 2 OF 4

OVERALL RATING	
PASS	<u>X</u>
FAIL	<u> </u>
DATA	<u> </u>

TESTING FOR
CA 65 LEAD & CADMIUM ON NON-FOOD /
BEVERAGE GLASSWARE-EXTERIOR

Sample Description:		DESCENDANT COATING CANDLE JAR	
Manufacturer:	CUPWIND COOPERATED FACILITY	P.O. No.:	/
Buyer:	PRV	Style:	
Country of Origin:	CHINA	Country of Destination:	USA
Commodity:	DESCENDANT	SKU Number:	11044-0090
Brand Name:	CUPWIND®		
Re-test:	Yes: ☐ No: ☒	Change Vendor:	Yes: ☒ No: ☐
Previous Report No.:	/		




Page 3 of 4

EXECUTIVE SUMMARY

Test content		Result Rating
Ca II (Leak) & Calcium on non-food/beverage glassware inference		Most Pass
Effectiveness of erasing	ASTM F2179-90 (Sec. 4.2.3.3) (M)	M PASS
	Wipe a large area outside surface, scratch twice from the back cracks of the article. Then position the article so that the outside bottom surface of the article. All scratches are to be made using sufficient pressure to just penetrate the surface of the glass. Wipe the article with water at the same room temperature as the glass. Wait 15 minutes, then dry the water and examine each groove for fractures. Count the number of fractures. Report the number of fractures, if any, for each test.	
Thermal shock	ASTM F2179-90 (Sec. 4.2.3.3) (M) (F) (M)	M PASS
	Modification: expanded scope to all other glass products in addition to beverage containers. 1. Prepare a hot water bath at 215 ± 1°C (420 ± 2°F). 2. Prepare a hot bath at 77 ± 1°C (160 ± 2°F). 3. Immerse the sample completely in the hot water bath and allow it to soak for 30 min ± 10 s. 4. Transfer the sample to the cold bath and immerse for at least 30 s. 5. Remove the sample from the cold bath and examine the sample for any cracking. 6. The hot water that collects within the container during the first immersion shall be retained in the container through the first immersion. 7. The time of transfer from the hot bath to the cold bath shall be 15 ± 5 s. 8. Modification: sampling procedure not followed and expanded scope to all other glass products in addition to beverage containers.	

REMARK.

1. Not reviewed/protocol for test results in this report.

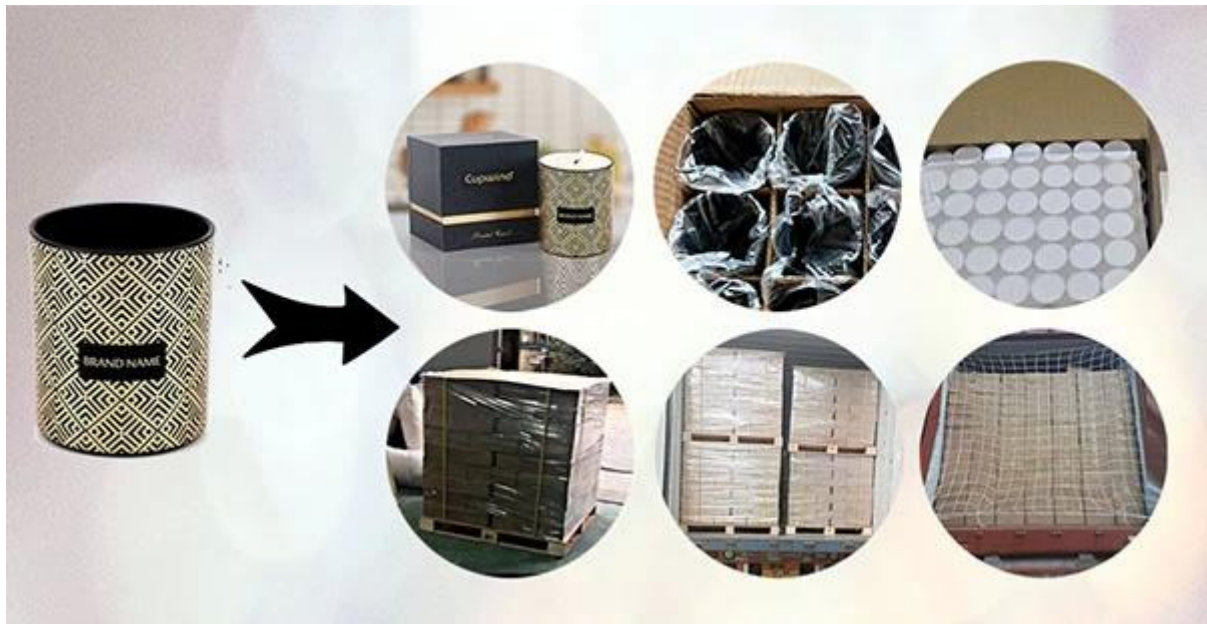

24/48/72/144 opp

[illegible]



Cupwind